

09-11-00

Express Mail Label No. EL172582453

Docket No.: END9-2000-0105 US1

NEW UTILITY PATENT APPLICATION TRANSMITTAL

(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Total Pages this Submission:3

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

System and Method for Front End Business Logic and Validation

and invented by: JEAN-PAUL CHOLLON, TIMOTHY R. KANE, AMY J. SNAVELY, SHERRY L. WILSON

If a CONTINUATION APPLICATION, check the appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part(CIP) of prior application
No.: _____

Enclosed are:

Application Elements

01. ☒ Filing fee as calculated and transmitted as described below
02. ☒ Specification having 83 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☒ Cross References to Related Applications *(if applicable)*
 - c. ☐ Statement Regarding Federally-sponsored Research/Development *(if applicable)*
 - d. ☐ Reference to Microfiche Appendix *(if applicable)*
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings *(if drawings filed)*
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure
03. ☒ Drawing(s) when necessary as prescribed by 35 USC 113)
 - a. ☐ Formal
 - b. ☐ Informal

Number of sheets: 20

NEW UTILITY PATENT APPLICATION TRANSMITTAL**(Large Entity)***(Only for new nonprovisional applications under 37 CFR 1.53(b))*

Total Pages this Submission:3

Application Elements (Continued)04. ☒ Oath or Declaration

- a. ☐ Newly executed (original or copy) ☒ Not executed
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
- c. ☒ With Power of Attorney ☐ Without Power of Attorney

05. ☐ Incorporation By Reference (usable if box 4b is checked)

The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Item 4b, is considered as being part of the disclosure of accompanying application and is hereby incorporated by reference therein.

06. ☐ Computer Program in Microfiche (Appendix)07. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all must be included)

- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy (identical to computer copy)
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts08. ☐ Assignment Papers (cover sheet & document(s))09. ☐ 37 CFR 3.73(B) Statement (when there is an assignee)10. ☐ English Translation Document (if applicable)11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS citation12. ☐ Preliminary Amendment13. ☒ Acknowledgment postcard14. ☒ Certificate of Mailing

☐ First Class ☒ Express Mail (Label No: EL172582453)

15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)

NEW UTILITY PATENT APPLICATION TRANSMITTAL**(Large Entity)***(Only for new nonprovisional applications under 37 CFR 1.53(b))*

Total Pages this Submission:3

Accompanying Application Parts (Continued)

- 16.
- ☐
- Additional Enclosures (identify below)

Fee Calculation and Transmittal**CLAIMS AS FILED**

For	# Filed	# Allowed	# Extra	Rate	Fee
Total Claims	15	-20	0	x \$18.00	\$ 0
Indep. Claims	10	- 3	7	x \$78.00	\$ 546.00
Multiple Dependent Claims _____					\$
				BASIC FEE	\$ 690.00
Other FEE (Specify purpose)					\$
				TOTAL FILING FEE	\$1,236.00

- ☐ A check in the amount of \$ _____ to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit IBM Corporation Deposit Account No. 09-0457 as described below. A duplicate copy of this sheet is enclosed.
- ☒ Charge the amount of \$1,236.00 as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees as required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated:

31 Aug 2000

Shelley M Beckstrand
Signature

Shelley M Beckstrand
Reg. No. 24,886

314 Main Street
Owego, NY 13827-1616
Phone: (607) 687-9913

CC:

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of: J. Chollon, et al
Serial No.: N/A Group No.: N/A
Filed: Herewith Examiner: N/A
For: System and Method for Front End Business Logic and Validation

Assistant Commissioner For Patents
Washington, D.C. 20231

EXPRESS MAIL CERTIFICATE

"Express Mail" label number: EL172582453

Date of Deposit: 09/07/00

I hereby certify that the following attached paper or fee


New Utility Patent Application Transmittal
Specification: 83 pages (including claims)
Declaration and Power of Attorney
Drawings (20 sheets)

Express Mail Certificate
Postcard

is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Georgia Y. Brundage

(Name of person mailing paper or fee)

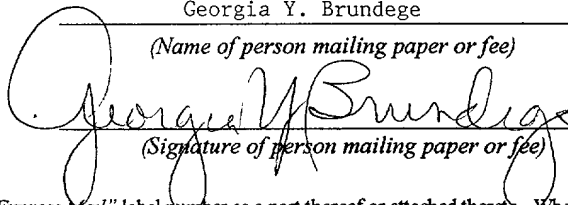
(Signature of person mailing paper or fee)

NOTE: Each paper must have its own certificate and the "Express Mail" label number as a part thereof or attached thereto. When, as here, the certification is presented on a separate sheet, that sheet must (1) be signed and (2) fully identify and be securely attached to the paper or fee it accompanies. Identification should include the serial number and filing date of the application as well as the type of paper being filed, e.g., complete application, specification and drawings, responses to rejection or refusal, notice of appeal, etc. If the serial number of the application is not known, the identification should include at least the name of the inventor(s) and the title of the invention.

NOTE: The label number need not be placed on each page. It should, however, be placed on the first page of each separate document, such as, a new application, amendment, assignment, and transmittal letter for a fee, along with the certificate of mailing by "Express Mail". Although the label number may be on checks, such a practice is not required. In order not to deface formal drawings, it is suggested that the label number be placed on the back of each formal drawing or the drawings be accompanied by a set of informal drawings on which the label number is placed.

a:\certESPRESSmail.wpd

APPLICATION

FOR

UNITED STATES LETTERS PATENT

APPLICANT NAME JP CHOLLON ET AL

TITLE **System and Method for Front End Business
Logic and Validation**

DOCKET NO. END9-2000-0105 US1

INTERNATIONAL BUSINESS MACHINES CORPORATION

CERTIFICATE OF MAILING UNDER 37 CFR 1.10

I hereby certify that, on the date shown below, this correspondence is being deposited with the United States Postal Service in an envelope addressed to the Assistant Commissioner for Patents, Washington, D.C., 20231 as "Express Mail Post Office to Addressee" on 09/07/00

Mailing Label No. EL172582453

Name of person mailing paper: Georgia Y. Brundage

Signature

Date

Georgia Y. Brundage 9/7/00

**SYSTEM AND METHOD FOR FRONT END BUSINESS LOGIC AND
VALIDATION**

Background of the Invention

Cross References to Related Applications

5 The following U.S. patent applications filed
concurrently herewith are assigned to the same assignee
hereof and contain subject matter related, in certain
respects, to the subject matter of the present application,
the teachings of which applications are incorporated herein
10 by this reference:

Serial No. 09/_____, entitled "System and Method for
Clustering Servers for Performance and Load Balancing",
assignee docket END9-2000-0104-US1;

15 Serial No. 09/_____, entitled "System and Method for Data
Transfer With Respect to External Applications", assignee
docket END9-2000-0106-US1;

Serial No. 09/_____, entitled "System and Method for
Providing a Relational Database Backend", assignee docket

END9-2000-0107-US1;

Serial No. 09/_____, entitled "System and Method for Providing a Role Table GUI via Company Group", assignee docket END9-2000-0108-US1;

- 5 Serial No. 09/_____, entitled "System and Method for Populating HTML Forms Using Relational Database Agents", assignee docket END9-2000-0109-US1;

- 10 Serial No. 09/_____, entitled "System and Method for Catalog Administration Using Supplier Provided Flat Files", assignee docket END9-2000-0110-US1; and

Serial No. 08/_____, entitled "System and Method for Providing an Application Navigator Client Menu Side Bar", assignee docket END9-2000-0111-US1.

Technical Field of the Invention

- 15 This invention pertains to a system and method for managing a requisition catalog on the web.

Background Art

END9 2000 0105 US1

A requisition catalog for a large enterprise in a web environment must enable very fast access to a very large database from a large number of clients. A large number of clients is required for optimal performance of a catalog system. There is a need to architect such a system so as to be scalable, that is, capable of providing that fast access to an ever increasing number of clients and a growing database or collection of databases.

In a requisition catalog system for a large enterprise in a web environment, there is a requirement for a system and method for insuring that all general ledger accounts associated with commodities are correct, and within this requirement for providing a description from the associated accounting system for use by customer or requester to select the correct general ledger (GL) account when doing financial validation on a requisition.

A requisition catalog for a large enterprise is stored in a very large database. However, a Lotus Notes database has a hard limit of 2 to 4 gigabytes of data. That is, Notes puts its entire database into one big Notes standard format(.nsf) file. Information in such a .nsf file is accessed by a system geometrically. As a result, such a system slows down significantly as it accesses larger files.

This slow down ramps up rather badly. Consequently, the hard limit is artificially put in because of this ramp up in access time. The typical solution to this problem is to split a very large database into many smaller databases.

5 Lotus Notes has a Lotus connector/Lotus script extensions connector (LCLSX). This allows connection to other databases but these script extensions are not set up to actually be the database. There is a need in the art for a system and method for utilizing Lotus script extensions in
10 combination with a relational database to provide high capacity storage without performance degradation.

In building a requisition catalog for a large enterprise with many suppliers, an automated process is needed to receive a flat file from a supplier for review by
15 a buyer before being externalized for use by requesters. While the buyer must be able to review the contents, he must be restricted from making changes to certain sensitive fields, such as changing a unit price or a unit of measure, both of which could constitute fraud. Consequently,
20 allowing the buyer to edit the flat file can't provide the level of security required. There is a need in the art to provide a buyer a means of auditing catalog content before externalizing it to production for access by requesters.

A requisition catalog for use in a web environment requires a very large database, such as an IBM DB2 database, and the functionality provided by, for example, a Lotus Notes server. However, a Lotus Notes access control list (ACL) can not be used control access to an IBM DB2 database, and the privileges on a DB2 table can be granted only by the table instance owner. Additionally, since Notes agents which access DB2 are running from a Notes server, the Notes server ID often has full access to all tables, and there is no way to limit that. That is, in a hybrid (Notes/DB2) environment, the user ID which accesses DB2 tables is the ID of the Notes server. Therefore, can't restrict access by a user to the DB2 tables. There is a need in the art for a system and method which allows certain users access to certain data in certain selected tables. That is, there is needed a system and method for providing very flexible access to DB2 tables without requiring database administrator (DBA) involvement to issue grants against the tables, and bypassing the problem caused by Notes agents all coming from the same user (the Notes server ID).

In a hybrid requisition catalog system for use in a web environment, much of the application data is stored in, for example, IBM DB2 tables. However, a web interface written in Java script and in HTML does not have functionality for

connecting to DB2 and reading data from DB2 tables. No
function is provided in Java script and in HTML to connect
to or access such a database. It is not presently possible
to make the connection by connecting to the database and
5 executing SQL queries. Consequently, there is a need in the
art for a system and method utilizing an existing
infrastructure including Lotus Notes, Domino Go, and DB2 to
combine HTML and Java script web presentation with DB2 data.

10 In a requisition catalog system for use in a web
environment by a large enterprise, there must be provide a
way to deal with web sites that exist outside of a firewall,
or internal applications within the firewall but outside of
the requisition catalog (Req/Cat Web or RCW) application.
That is, a system and method is required for transferring a
15 large quantity of data back from such a web site or
application to the RCW application in a timely manner. One
possible way is to send data on the universal resource
locator (URL). However, such a URL is limited to 1K bytes,
which is not enough to do the task quickly for the
20 quantities of information required. Information can be put
into a frame, and that information can be read, but only if
the information is written and read by the same server.

In a preferred system, the RCW application exists in a
END9 2000 0105 US1 6

frame set in a browser. As part of security for such a browser, Netscape and Internet Explorer (IE) establish ownership of the frames: each frame is a window under control of the browser. A user can open up a session in any frame desired. However, if all of the frames are not owned by same session, then these frames not commonly owned cannot see the contents of each other. In Netscape version 4.51 frame ownership was changed to protect against frame spoofing. Frame spoofing is a way other servers can use to trick the owner of a frame into thinking it had created a frame actually created by someone else, enabling access to data not owned. Netscape 4.51 plugs that hole.

Consequently, in the new environment (with spoofing inhibited) a problem is presented: if a RCW application needs to access an outside supplier site for information to get back through one its own the frames, as soon as data is written by that outside supplier site into one of the frames owned by RCW, ownership of the frame is transferred from RCW to the supplier; RCW no longer owns the frame and cannot access the information. A system and method is needed to enable transfer of data from a supplier site to a RCW application which does not entail frame spoofing.

In a web application, such as a requisition catalog

system for a large enterprise, a fast browser interface and navigator is needed, including a very fast graphical user interface (GUI).

5 There is known in the art several Internet applications which provide a strip down, for example, the left hand side of a window that has menu of items from which a user may select. Such windows also may display a header, including header type items which will expand upon selection into a drop down list. Such windows also may include a footer including leafs which will, upon selection, change what is
10 seen on right side of screen. Such applications provide a very nice user interface for documents, with a table of contents (TOC) on the left, and on the right the selected contents.

15 However, these expandible and collapsible menus are characteristically slow. This slowness is a result of every click sending a request to a remote server, which server responds by sending information back to expand the list at the browser. Every click on the web is slow, involving
20 communications of the request and response over a relatively slow web communication link. There is, therefore, a need in the art to dramatically increase the speed of operation of a graphical user interface at a browser.

It is an object of the invention to provide a scalable database system in a web environment with optimal access performance characteristics for an expanding number of clients and a growing database.

It is an object of the invention to provide a system and method for enabling a requester to select the correct general ledger account when doing financial validation on a requisition.

It is an object of the invention to provide a system and method for utilizing Lotus script extensions in combination with a relational database to provide high capacity storage without performance degradation.

It is an object of the invention to provide a system and method for enabling a buyer a means for editing catalog content before externalizing it to production for access by requesters.

It is an object of the invention to provide a system and method for providing very flexible access to DB2 tables without requiring database administrator (DBA) involvement to issue grants against the tables, and bypassing the

problem caused by Notes agents all coming from the same user
(the Notes server ID).

It is an object of the invention to provide a system
and method utilizing an existing infrastructure including
5 Lotus Notes, Domino Go, and DB2 to combine HTML and Java
script web presentation with DB2 data.

It is an object of the invention to provide a system
and method for enabling transfer of data from a supplier
site to a RCW application which does not entail frame
10 spoofing.

It is an object of the invention to provide a system
and method for dramatically increasing the speed of
operation of a navigation frame of a GUI.

Summary of the Invention

15 A system and method for creating a valid chart of
accounts from which an administrator can facilitate and
enable a requisitioner to select a valid general ledger
account. A chart of accounts with descriptions is pushed

from an enterprise system to a requisition catalog system database. An administrator selects from the requisition catalog system database valid accounts with descriptions for a given commodity and purchase period; and then pushes a selected account/description tuple to company commodity groups for use in a requisition creation process.

Other features and advantages of this invention will become apparent from the following detailed description of the presently preferred embodiment of the invention, taken in conjunction with the accompanying drawings.

Brief Description of the Drawings

Figure 1 is a high level system diagram illustrating a clustered configuration of servers for performance and load balancing.

Figure 2 is a diagram illustrating proxying out of URLs to clustered servers.

Figure 3 is a system diagram illustrating a specific example of a clustered configuration of servers.

Figure 4 is a diagram illustrating the frames comprising a typical screen display.

Figure 5 is a diagram illustrating a specific instance of the display of Figure 4.

5 Figure 6 is a diagram illustrating ZIP code validation.

Figure 7 is a diagram illustrating requisition catalog searching.

Figure 8 is a diagram illustrating the mapping of commodity codes to accounting codes.

10 Figure 9 is a diagram illustrating a commodity document.

Figure 10 is a diagram illustrating a pyramid structure of application program interfaces.

15 Figure 11 is a diagram illustrating the graphical, database, and business logic API's of the pyramid structure of Figure 10.

Figure 12 is a diagram illustrating the interaction of

API's with each other, a database, and a browser.

Figure 13 is a diagram illustrating an example configuration of API's.

Figure 14 is a flow diagram illustrating the operation
5 of the userProfile class of Figure 13.

Figure 15 is a system diagram illustrating the system of Figure 1 for accessing a requisition catalog.

Figure 16 is a system diagram illustrating a system for
10 using a staged requisition catalog built from supplier flat catalog files.

Figure 17 is a flow diagram illustrating the steps for receiving a supplier flat catalog.

Figure 18 is a flow diagram illustrating the steps
15 executed by an application server and database server for building and accessing a requisition catalog.

Figure 19 is a diagram illustrating a user profile.

Figure 20 is a diagram illustrating a Notes agent for

building an HTML page from a DB2 table.

Figure 21 is a diagram illustrating Notes agents for transferring data to an application browser session from a supplier window.

5

Best Mode for Carrying Out the Invention

1. Clustered Servers

In accordance with the preferred embodiment of the invention, a requisition catalog system (RCW, or Rec/Cat Web) is provided within a global web architecture (GWA) infrastructure. Such an architecture provides for the large number of clients required to assure good performance. In an exemplary embodiment, the requisition catalog application is deployed within the IBM web domain, which requires the use of GWA for clustering of W3 and www.ibm.com web sites. This architected solution assures a scalable Req/Cat Web application.

Referring to Figure 1, client browsers 100 are connected to a GWA infrastructure including network dispatcher 102 and domino.go, a virtual cluster of Domino servers. Network dispatcher 102, sprays out or dispatches requests among configured servers S1, S2, S3 in virtual server cluster 104. Communications from cluster 104 are, in turn, dispatched (also referred to as sprayed out, distributed, proxy passed, or redirected) by network dispatcher 106 among servers S4, S5, and S6 in Domino cluster 112. While three servers are illustrated as configured in each of clusters 104 and 112, each cluster configuration may be scaled to any number of servers. External objects 108, which can be stored on a distributed file system (.dfs), include graphic files, Java files, HTML images, net.data macros, and other .nsf files external to Domino, and in particular include configuration file proxy statements 110. In this instance, external objects 108 are stored on a .dfs and exist only once, so it is not necessary to replicate all of the external objects to each of the servers S4-S6. External objects 108, served in a .dfs are graphic files, Java files, anything that would live outside of the server files (also referred to .nsf files) S4-S6, including HTML images and net.data macros. These are part of the code implementing the Req/Cat Web application of the preferred embodiment of the invention, but are not part of

Domino code, and are primarily for the GUI. By storing them outside of cluster servers 112, performance is improved.

In order to avoid potential bottlenecks on the clustered Domino servers 112 and in order to store a larger amount of data than is quickly searchable in Domino, a relational database 129, such as the IBM DB2 database, is used to store configuration data. Data is written by the clustered servers 112 by the end user, or by batched programs stored on application server 114 that are receiving data from back-end systems 116.

Referring to Figure 2, in accordance with the invention, a proxy pass is used with both domino.go cluster 104 and Domino cluster 112. In accordance with a proxy pass, when a URL 120 is passed to network dispatcher 106, the NP processes that out and sprays it to any one of the configured servers. Spray means to distribute or map a URL 120 to any one of these configured servers S1-S3, S4-S6, which is the effect of mapping, as is represented by line 126, URL 120 to any of S4, S5, S6 in cluster 112. Examples of URLs include <w3.ibm.com/*>, <www.ibm.com/*>, and <w3.ibm.com/transform/reqcat/?opendatabase rccreate>.

In accordance with the invention, a unique architecture

for a requisition catalog system includes a hybrid application using external objects 108 in a distributed file system off of the domino.go cluster 104 that works with network dispatcher 106 and the proxy pass capability 110 to redirect traffic to the Domino cluster 112.

These servers S4-S6 are mirror images: each has same .nsf files. Periodically, these servers replicate back and forth so that information is contained in all of them. Data is kept consistent.

In operation, when a client comes in through browser 100, his request can be directed to any domino.go server S1-S3 that determines the mapping of the URL request and what type of function is needed (displaying of images or code execution on S1-S3, or connecting to an .nsf server S4-S6 to display user data).

.nsf servers S4-S6 then feed requests to the application server 114, which in this embodiment is a backend Req/Cat Web (RCW) server to which all data gets replicated and where the bridges and agents run. Data gets replicated out to other back-end servers (DB2, MVS, SAP) 116 as needed. A bridge is an application that transfers data from one server to another server. An agent is an

application that runs scheduled or by request to do some processing of data.

In an exemplary embodiment, Domino.go, or virtual server cluster, 104 is part of the GWA infrastructure. Any w3.ibm.com or www.ibm.com must go through a domino.go cluster 104. In accordance with the present invention a proxy out to the Domino cluster 112 is also provided. The purpose of this is to improve scalability and performance. Proxy statements 110 are used to ensure that the proper pieces of the application are invoked as appropriate, depending upon what the end user is doing. These statements are a mapping through a configuration file of URL 120 to any clustered server 112.

Referring to Figure 3, a specific exemplary embodiment of the invention includes client browser 100 connected to network dispatcher (URL redirect) 102, which is connected to GWA shared GO cluster (W3-1.IBM.COM) 104. Cluster 104 is connected to external objects including OBI 117 and DFS 118, to dedicated DB2 server 129, and to network dispatcher (proxy) 106. Dispatcher 106 is connected to dedicated Domino "end user" cluster 112. Cluster 112 is connected to Blue Pages database 121 (an internal personnel database), dedicated DB2 server 129, dedicated Domino "application"

server 114, and other Notes databases 119, including Skills Matching (an application for contracting technical services), AMNF (an application for identifying nonmanager requisition approvers), and public address book (PAB, for user login and authentication). Application server 114 is connected to FormWave 125 (an application that does approval form routing), PRISM/Copics 123 (which are requisition feeder systems on MVS and AS/400), SAP 382 (an ERP, or enterprise resource planning system, including an accounting application having an accounts payable function), dedicated content staging server 127 where an administration Notes client 128 runs, and dedicated DB2 server 129. The content staging server is used to update both .nsf and DB2 configuration data, and is also connected to server 129.

The architecture of Figure 3 presents a complex, scalable global procurement application (referred to as Req/Cat Web) implemented within Global Web Architecture (GWA). Req/Cat Web allows customers to generate on-line, general procurement requisitions. Customers interfacing client browser 100 can search through vendor catalogs to select items and fill in order information. Submitted requisitions are routed through an approval process using FormWave 125. Requisitions that have been approved are sent to a back-end system (SAP) 382, where a purchase order is

cut and billing occurs. Customers can monitor their
requisition status, as the back end sends status updates to
the application 114.

Technologies utilized in building Req/Cat Web include
the following: Domino.Go 104 provides a proxy passing
function and caching facility. Lotus Notes/Domino is used
for its security and workflow capabilities. DB2 provides
rich relational database functions and data management.
Net.Data is used for its catalog searching functionality.
Javascript is used for GUI presentation and data
verification. Req/Cat Web application code sits on DFS 118,
on the Domino cluster servers 112, and on Domino application
server 114.

Architectural elements include load balancing, file
storage, end-user front end (which reside in the Domino
cluster servers 112), back-end processing, external
dependencies, and use of frames.

For load balancing, Req/Cat Web uses the GWA proxy pass
architecture, documented in the presentation currently
available on the Notes/Web application CoC Web site at
<http://w3.coc.ibm.com/coc/cocweb.nsf/Homepages/gwatrain.html>.

Network dispatchers 102, 106 are used between the client 100 and the Domino.Go cluster 104 and also between the Domino.Go cluster 104 and Domino cluster 112 to automatically balance the load of http requests among servers S1-S3 and S4-S6. Configuration file (httpd.conf) 110 contains the proxy statements that are used for redirections. When a client 100 enters the url (w3.ibm.com/transform/reqcat) and Network dispatcher 106 redirects the client to the appropriate server 112, the redirection is transparent to the client.

Workload is split between Domino.Go 104 and Domino 112 to improve performance.

File storage is provided by dynamic file system (.dfs, or DFS) 118, which contains javascript files (.js), html, images, and net.data macros. Domino servers 114 contain navigation, configuration, create requisition, open requisition, requisition invoice paid, requisition archive, cost center, confirmations, and help databases. DB2 server 129 contains tables including: confirmations, user profiles, zip codes, accounting data, commodity configuration data, buyer information, routing, and catalogs.

An end-user front end for Req/Cat Web uses Domino

authentication to permit login to the application. The client uses his Lotus Notes ID and pre-set http password to "authenticate". When a client logs in at browser 100, the Domino servers 112 (S4-S6) are configured to check the name and password in public address book 119, which is a designated server within GNA. In a further exemplary embodiment, secure login function may be provided through the implementation of digital certificates. Data is retrieved from DB2 129 using LC:LSX calls via Notes agents, or Net.Data. Net.Data is used for a catalog searching and drill-down function. Java APIs are used for information retrieval from BluePages 121.

As much processing as possible is performed asynchronously on the back-end, application server 114. Bridge jobs are scheduled on two levels: system level (CRON) and notes level (Agents). Agents run periodically, say hourly, to process requisitions and send them to SAP 382. Other agents are scheduled off-peak, where ever possible.

External dependencies include FormWave for form approval routing, BluePages for personal data for user profile creation and approver changes, interfaces to Open Buying on the Internet (OBI) server and skill matching applications, and SAP for receiving requisitions for

purchase order (PO) creation and processing. Information returned by SAP to Req/Cat Web includes requisition status, PO/RFS status, PO history, negative confirmations, currency codes, and configuration information.

5 By using frames, a large majority of preprocessing can be performed dynamically, on the client, reducing the number of trips back and forth to the server. This is a tremendous boost to performance. The web screen described hereafter is not the result of a Notes form, but rather of a dynamically generated HTML/javascript code produced by a

10 displayReqHeader() function. This function dynamically writes html and javascript code into the content frame of the application. The javascript function is coded in a displayreq.js file stored on the filesystem and loaded into

15 a jsCode frame by a source (<script src= "../js/displayreq.js">) command in a jscode.html file at the time when the initial frameset is loading. A displayReqHeader() function is called from several places in the application to redisplay the requisition information in the content frame.

20 This screen is called any time a WebReq Lotus Notes form is opened by an OpenForm command for a new requisition, or by an OpenDocument command when an existing document is opened. OpenForm occurs when the displayReqHeader() javascript function is called as the last part of an OnLoad event coded

in the HTML-Attributes property of the WebReq form. Any time an existing document is opened that was saved with Form-WebReq, the OnLoad event causes the displayReqHeader() javascript to be run to OpenDocument. Any time a content
5 frame has been loaded with some other page during the processing of a requisition, and the user performs an action to return to the requisition in process, the dispalyReqHeader() javascript function is called directly. This form reads the information stored in reData frame and
10 dynamically fills the content frame with this screen.

Referring to Figures 4 and 5, as will be more fully described hereafter, a screen display includes header frame 470, navigation frame 472, footer frame 474, temporary data frame 476, request data frame 478, and content frame 480.
15 The tempData frame 476 is used as a temporary holder for information, and to direct calls dynamically, while keeping the current data in the screen, and making the return data available to the application.

Table 1 shows, for the exemplary embodiment of Figure
20 3, the software loaded on each of the servers used for the Req/Cat Web application.

TABLE 1 SERVERS AND SOFTWARE

1	<u>Server Description</u>	<u>Software</u>
2	Domino.Go Servers S1-S3	AIX 4.3.2
3		Domino Go 4.6.2.6 with Denial
4		of Service Fix
5		Net.Data 2.0.8
6		DB2 CAE 5.2
7		DFS Client
8		Java Runtime 1.1.6
9	Domino End-User Servers S4-S6	AIX 4.3.2
10		Domino 4.6.4
11		DB2 CAE 5.2
12		Java Runtime 1.1.6
13	Domino Application Server 114	AIX 4.3.2
14		Domino Go 4.6.2.6 with Denial
15		of Service Fix
16		DB2 CAE 5.2
17		Java Runtime 1.1.6
18		Mercator 1.4.2 with Svc Pack 3
19		Hith Test API
20		Lotus VIM
21		C++ 3.6.4
22	UDB Server 129	AIX 4.3.2
23		UDB 5.2
24		Java Runtime 1.1.6
25	Content Staging Server 127	AIX 4.3.2
26		Domino 4.6.4
27		DB2 CAE 5.2
28		Java Runtime 1.1.6

2. Front End

The Req/Cat Web front end provides several validation routines, including ZIP code validation, catalog search

criteria, and chart of account validation. In the
architecture of Figures 1 and 3, various programs, including
ZIP code validation, catalog search and chart of account
validation routines reside in application server 114, and
5 the data tables, including the chart of accounts, reside in
the relational database 129.

ZIP code validation is provided to assure that the tax
department is provided the information needed implement the
correct tax rules on purchase orders in SAP 382.

10 Chart of accounts validation includes the mapping of
commodity codes to account codes. This is done to insure
that all general ledger accounts associated with commodities
are correct, and within this to insure that a description
from SAP 382 is available for use by a customer to select
15 correct general ledger (GL) account when doing financial
validation on a requisition.

Referring to Figure 6, for ZIP code validation, when a
purchaser access RCW, a user profile 130 is accessed.
Profile 130 includes many defaults, one of which is delivery
20 information (defaulted to all line items of requisition).
One of the fields in profile 130 is ZIP code. When the
purchaser enters his ZIP code, RCW searches ZIP code

database 134, a database for ZIP codes which is fed
periodically, say nightly, from the enterprise tax system
136. This same validation routine continues by creating a
requisition 132 with item options, including deliver to
5 information with a zip code field. The requester can change
the deliver to information, 132, but any time it is changed,
the ZIP code is checked against ZIP code database 134.
Whereas previously, customer input of ZIP code was accepted
without checking. By this invention, ZIP code validation is
10 performed at the front end by a java or SQL program call to
db2 database 134. Responsive to entry of ZIP code on a
requisition or to the changing of delivery information which
includes ZIP code on a requisition line item, the ZIP code
is validated against a database of valid ZIP codes. In an
15 alternative embodiment, the ZIP code database is refreshed
from a trusted source, and the entered or changed ZIP code
is checked for valid match with respect to state and city.

A create requisition request goes to catalog search,
which used to search by part number or description.

20 Previously, this was a very limited search to just the
catalogs. A search argument of %pen% was not a very crisp
search for the customer. In order to improve the catalog
search, in accordance with the present invention, searches
may be conducted against a longer description and files up

to 255 characters. Screen down searches are provided for sub-commodity. Wild card searches used to require %, but now assumes a wild card search in all cases. Searches are also provided against subcommodity. As a result, catalog searches now reference short description, long description, and catalog sub-commodity. A database catalog includes part number, short description, long description, oem part number, commodity code. Newly added is subcommodity.

Referring to Figures 7 and 9, the method of the preferred embodiment of the invention is described for managing a chart of accounts 140. When creating a commodity list, which includes expense, capital, and resale accounts 142, commodities descriptions 180 are pushed to the correct commodity group. The resulting chart of accounts 140 is available from SAP 382. Previously an administrator had input a chart of accounts. Now, a company administrator, for example, may select from commodity accounts 142 the expense field, which results in drop-down display of a valid chart of accounts 144 from SAP chart of accounts 140 with account numbers 148 and commodity descriptions 146. The company administrator may then select from that valid chart of accounts 144 the correct commodity to push to company/commodity document 150.

Referring to Figure 8, the process for a requester to create requisition is set forth. By way of example, a requestor creates a requisition by doing in step 154 a search for "supplies", which will bring to him in step 156 a display presenting commodity W14, and thence in step 158 to a catalog (for example, a Staples catalog) which includes commodities (pens, erasers, calendars), from which the requester can create several line items. Upon selecting "proceed to accounting", the requester is presented a financial summary 160 including commodity code w14 pens for line item 1, w14 erasers for line item 2, and w14 for line item 3 calendars. The user may then request display of financial worksheet 162. In this window 162, the requester will see a title 164 expense, which can be changed, for example, by toggling to other categories, such as balance sheet. Selecting G/L account 166 may drop down a list showing several account codes 168 and related descriptions 170, depending upon what the company administrator has pushed to the commodity document 150 from which financial worksheet 162 is derived. Previously, a requester was provided in worksheet 162 one account code choice without description. By this invention, the requester is provided correct general ledger account codes and descriptions, resulting in less miscodes, more correct ledger entries, and correct SAP account codes. This improved general ledger

account selection process avoids back end processing to correct erroneous entries.

Thus, in accordance with a preferred embodiment of the invention, a method is provided for creating a valid chart of accounts from which an administrator 184 can facilitate and enable a requisitioner to select a valid general ledger account. First, there is push from an enterprise (erp) system a chart of accounts 140 with descriptions to a req/cat system database. The administrator selects from req/cat system database valid accounts with descriptions for a given commodity and purchase time period, and then pushes the selected account/description tuple to the company commodity groups, thus completing the setup of the commodity documents 150 to be used in the requisition creation process. A company commodity document 150 created by administrator 184 may include for each commodity code under each company, commodity code 152, which is a very broad category, short description 190, long description 191 (from procurement organization 182), key words 192, approvers 193, financial information 194 (including purchase type 198, and general ledger account 199), route-to buyer 195 (by plant association), preferred supplier 196 (which associates the commodity code to a catalog 158), and special handling code 197 (with drop list including, for example, skills matching,

obi, administrative services) -- all used to drive the customer to the correct commodity.

To create a requisition, a user searches against commodities and catalogs in commodity description documents 150, which may be Notes documents or DB2 records, and creates one or more line items. These searches may be done by catalog and non-catalog, and driven based on descriptions entered by requester. A hierarchy of families may be provided as an alternative search approach. The requisitioner initiates a proceed to accounting process, which displays line items which may be selected by requisitioner; and then displays a financial worksheet created by a Java agent with fields which need to be selected or populated by the requisitioner from the company commodity document, based on purchase type, and which presents valid general ledger accounts numbers and descriptions to the requisitioner.

3. Back End

Referring to Figure 12, in a large enterprise, the requisition catalog requires a very large database. In accordance with the preferred embodiment of the invention,

such a large data repository is provided by the using the IBM DB2 relational database 210. Other possible databases include Oracle, Sybase, and MSSQL.

Lotus Notes databases are built upon an object model and classes: databases, views, and documents are classes used to access Notes data. But, these classes are set to be final and not extendible, and a Req/Cat Web database must be extendible.

Consequently, referring to Figure 12, in accordance with an embodiment of the present invention, DB2 access routines 208 are provided for accessing DB2 data 210. The Req/Cat Web application executes Lotus code, with access controlled on the code, and data obtained from and written to relational database 210.

Normally, Notes saves all data as documents. There is a save method provided for that purpose. In accordance with a preferred embodiment of the invention, the Notes save method is intercepted and stopped, and execution passed to Req/Cat Web code for saving data to DB2. In the same way, execution of a Notes open method is intercepted and stopped, and then Req/Cat Web code executed to pull information in from DB2.

Lotus Notes provides for web applications, and supports methods called webqueryopenagent, and webquerysaveagent. Notes also provides a saveoptions parameter. Setting saveoptions to zero tells Notes not to save a document.

5 In accordance with the preferred embodiment of the invention, saveoptions is set to zero, and webquerysaveagent used to save data in DB2. The webquerysaveagent is written in Lotus Script, and calls Lotus Script extensions and also can also call its own APIs 200, 202, including the database
10 api's 208. At this point, Req/Cat Web has full control, and can save one or many tables, can explode the data model and write many tables.

On the other side, instead of editing an existing document as is done with Notes, Req/Cat Web executes
15 createnewdocument. As the document opens, Lotus Notes gives the query webqueryopenagent, and this is also written in Lotus Script, which has access to data base api's 202, where data from many database 210 tables may be read to construct a Lotus document from DB2.

20 This configuration involves some naming standards and a hierarchy of interfaces. By way of example, database access routines are, by convention, data application programming

interfaces (DAPI) 208. These are routines for accessing data 210 outside of the Req/Cat Web application. Referring to Figure 10, a hierarchy of application program interfaces (APIs) includes core API's 200 containing everything necessary to connect to database 210. Next in hierarchy, to access specific data, are database API's (DAPI) 208, which interface to a single piece of data (such as company or employee information.) Below these rest the business logic code 204.

In a programming environment, the top of pyramid represents the work of a core DB2 programmer. Below him are those people who use core DB2 API's and write, for example, DAPI's 208 to access individual DB2 tables within database 210, for example API's for countries. These core APIs 200, therefore, include a GET method, and update, insert, and delete routines. Third level 204 represents the application programmer who only needs to use these methods (ie, company dapi: IBM US) in their business logic 204 applications, including ability to update, for example.

Referring to Figure 11, this same pyramid is used to implement graphical APIs 206 on the user interface 212, business APIs 207 on the business logic 204 interface, and database APIs 208 on the database 210 interface. This

illustrates that duties of programmers can be separated, so that everyone need not know the complexities of the entire system. That is, some developers work on data manipulation, others on the user interface, and still others on business logic. The application developer need not know the names of the actual database, tables, or fields, or even how to access them. This also enables a DB2 administrator to alter a table, and only affect the one DAPI developer that wrote the specific table DAPI 202. All code is one routine, so changes to the database need only affect one piece of logic.

Referring to Figure 13, an example of this API implementation is illustrated. CoreDB2 220 is the core API 200 to connect to DB2 210. It contains two classes, configuration class DB2Config 222 and base class DB2Base 224.

Calling DB2Config 222 determines database name 230, user identifier 231, and password 232 - information that the database requires to establish a valid connection, and is passed to DAPI 208 for making that connection. (Without this method, user IDs and passwords would have to be hard coded in the application.)

DB2Base 224 is extended by the DAPI 208 programmer for

END9 2000 0105 US1 35

each DAPI 202 instance that is needed. It contains methods 240, 241 for connecting to and disconnecting from the database, a method 242 for defining the number of rows to return at a time, a method 243 for getting the next group of records, methods for reads 244, inserts 245, updates 246, and deletes 247, commit 248 and rollback 249 options, and a flag 250 to determine if all data has been retrieved.

DAPIUserProfile 226 is a class for retrieving or updating information about an employee. It extends DB2Base 224 so the application 204 developer would not have to write the logic to access DB2 210, but could concentrate on the information about the employee. The DAPI 202 developer would need to know about the employee table (table and field names, for example) and would implement methods for selecting and displaying data. In an exemplary embodiment, DAPIUserProfile class methods include the following:

```
260  selectEmployeeByEmplID(employeeID,companyCode,  
      countryCode)
```

```
261  selectEmployeeByWebID(employeeWebID)
```

```
262  selectEmployeeBothWays(employeeID,companyCode,  
      countryCode,employeeWebID)
```

```
263  selectEmployeeByName(lastName,firstName)
```

```
264  insertEmployee(columnNames,DB2ColumnValues)
```

```

265  updateEmployeeByEmpID(employeeID,
    employeeCompanyCode,employeeCountryCode,
    UpdateNameValues...)
266  updateEmployeeByWebID(employeeWebID,
5    UpdateNameValues,UpdateByUserID)
267  deleteEmployeeByEmpID(employeeID,companyCode,
    countryCode,UpdateByUserID)
268  deleteEmployeeByWebID(employeeWebID,
    UpdateByUserID)
10  269  deleteEmployeesWhere(Condition, UpdateByUserID)
270  clearTable()

```

Once the data is selected, a few of the properties that are available for a given employee include empWebID, empLastName, empFirstName, empIntPhoneNum, empExtPhoneNum, empEmailID, empID, empCompanyCode,empCountryCode, and empCountryName.

An application 204 like the human resources (HR) application would then need to read HR data and insert it into the employee table if the employee did not exist, or update it if something changed, or delete it if the employee no longer exists. This application developer would then only have to know the methods and properties of the userProfile class 226 in order to write the application. An

example of such an application is set forth in Table 2, with reference to the steps of Figure 14. This table sets forth the HR load routine, a batch program to read HR data from a flat file and insert it into the DB2 user profile table.

TABLE 2 EXAMPLE APPLICATION

```

1      'in the following step, instantiate a DB2 config
2      object, and call it db2; the database name 230, etc.,
3      is determined by instantiating the db2 config object,
4      as defined by the core programmers'

5      272: Dim db2 As New DB2Config(session)

6      'the database information is known, and can be passed
7      to the employee profile.'

8      274: Print "The target DB2 database alias is "&
9      db2.getDB2DatabaseName()

10     'All that must be done is to pass the DB2 class to the
11     userProfile.'

12     276: Dim eps As New userProfile(db2)

13     'Delete everything from the employee table to start the
14     bridge.'

15     278: If headerDivision = "" Then
16         Call eps.clearTable()
17     Else
18         Call eps.deleteEmployeesWhere("COGRP_CD= ""
19         &headerDivision &""")
20     End If

21     280: For count = 2 To records-1

22         'Read the next record and make sure that it can be
23         loaded without problems'

24         If ReadInputFile(inputFileNum, count, userid, al, cl
25         eps, cci) Then

```

```

26         Call eps.insertEmployee(DB2ColumnNames,
27         BuildDB2ColumnValues())
28         db2kAdditions = db2Additions+1
29     End If
30 Next...

```

In Table 3, a pseudo code example of use of the webquerysaveagent process is illustrated.

TABLE 3 WEQUERYSAVEAGENT EXAMPLE

```

1     Dimension db2 As New DB2Config(session)
2     Print "The target DB2 database alias is "&
3     db2.getDB2DatabaseName()
4     Dimension eps As New userProfile(db2)
5     execute process 260 to selectemployee by employee id
6     if employee does not exist, then
7         execute process 264 to insert employee
8         else if employee changed, then
9             execute process 265 to update employee
10            else (employee not changed) information to user
11            "employee not changed"
12            no save
13        endif

```

In the example of Table 3, an application programmer 204 is using a dapi written by programmers 202.

In this manner, the relational database 210 is used as the data source, instead of a Notes database, in a way that hides the complexities of DB2 database programming. That is, in a fashion to similar Notes programming - the idea is to allow a Notes programmer to use a familiar looking class 226 to load and save data.

4. *Catalog Administration*

In accordance with the preferred embodiment of the invention, a requisition catalog administration function provides control, audit, and publishing procedures for flat files received from suppliers.

Referring to Figure 15, a system architecture for implementing catalog administration includes a requester browser 410, a buyer browser 412, with net.data connections 391 and 393 to a dedicated DB2 server and DB2 database 390 having a staging table 392 and a production table 394 through network dispatcher 102 and Go cluster 104. Go

cluster 104 is also connected through network dispatcher 106 and Domino cluster 112 to Domino application server 114.

A buyer 412 accesses staging table 392 via net.data connection 391, and a requestor 410 accesses the production 394 table via net.data connection 393. This connection 391, 393 is implemented as a single path, and the requester and buyer provided different levels of authority to access different tables 392, 394 in DB2 390 over that same path. Buyer 412 can change selected fields in the staging table 392 and can update production table 394 from staging table 392. Requester 410 can only view (not change) the production table 394. The buyer at browser 412 is controlled by a GUI which contains access control list (ACL) control on fields, and edit authority for catalog access.

Referring to Figure 16, this architecture further includes a catalog flat file 314, an application program 384 within application server 114, catalog administration function 386, Req/Cat Web function 388, and WEB communications 396 and 398 connecting a catalog administration function with ACL control 400 and requester 402 to database 390.

In operation, catalog flat file 314 is received by application server 114 through firewall 380 via EDI and

loaded into DB2 database 390 by application program 384.
Catalog administration function 386 specific users 400 audit
control over certain fields in staging table 392, and
publishes the catalog data to the live, or production,
5 system 394. Function 386 presents to buyer 400 a staging
table 392 with a GUI front end, with selected fields enable
and other fields not enabled to be personalized.

Catalog file 314 is a flat file containing catalog
items in a column delimited format specified to supplier 300
10 by the enterprise.

Application server 114 manages database 390 containing
staging table 392 and production table 394. A catalog file
314 comes to application server 114, which includes a
program 384 for moving data from that flat file to staging
15 table 392.

A buyer at terminal 400 accesses the staging table 392
on the web 396. He views catalog items and enters
transactions with action button which transfers information
from staging table 392 to production table 394. Production
20 table 394 is referenced by req cat web 388, and staging
table 392 is referenced by the catalog administration
function 386 operated by the buyer 400. Typically, a buyer

is member of procurement organization with responsibility for negotiating deals with suppliers. A requester 402 accesses production table 394 over web 398 to create and submit a requisition to SAP 382.

5 In accordance with the preferred embodiment of the invention, control over what buyer 400 can change is provided by a GUI in a process which loads a catalog 392 from a supplier into a production system 394.

10 Catalog files 314 come in from suppliers in an enterprise defined standard format, and the access to fields in that format is hard coded into the catalog administration function 386. Application server program 384 has error checking functions to assure validity of a catalog 314 from a supplier 300. Buyer 400 accesses staging table 392 through a catalog administration function 386 which has hard coded into it the access controls on the various fields in the catalog format. Production table 394, which is accessed by the requester 402, is updated periodically (upon buyer actuation) from the staging table 392.

20 Implementation of the invention involves several code procedures: there is a program 384 which loads a file 314 that is received via EDI into a table 392 in DB2. There are

routines 388 which allow a buyer 400 to browse certain catalogs in the staging table 392 and change certain fields while being inhibited from changing others. And there are the routines 386 which take the approved catalog and migrate the data from the staging DB2 table 392 to the production DB2 table 394.

Referring to Figure 17, a preferred embodiment of these processes are presented. In supplier system 300, supplier source data 310 is extracted and reformatted in step 312 to create catalog flat file 314 in the format specified by the enterprise. In step 316 that flat file is transmitted to the enterprise 302, as is represented by line 305, where it is accepted in step 320 into the enterprise EDI mailbox 322. In step 324, the data in the flat file in mailbox 322 is reformatted and put into generation data group (GDG) 328, a location for saving more than one file, so as to retain the last N iterations, and a archive entry made to processing log 326. In step 330, a delivery component executes to send data from GDG 328 to application server 114, as is represented by line 303, in the form of catalog flat file 340. In step 342, a delivery component receives the flat file and, as is represented by line 347, starts job scripts including MASSLOAD for reading the flat file and loading staging table 392, and as represented by line 345 alerts the

buyer 352. As is represented by lines 311, 313 and 315, respectively, MASSLOAD 344 accesses database server 306 procedures catalog_s 360, product_s 362, and Req/Cat Web 364, and makes an archival entry to processing log 346.

5 Catalog_S 360 is the staging table 392 for the catalog profile, which provides for each catalog the supplier name, the start and end dates of catalog validity, the currency, and so forth.

10 Product_S 362 is the staging table 392 that holds the catalog parts, a listing by part number of price, description, and so forth.

Req/Cat Web validate procedure 364 is a Java stored procedure for performing the initial validation of data received in flat file 340.

15 Front end 370 is a GUI used by the buyer, for example to update the catalog 366.

20 In operation, validation procedure 364 validates the format and identifies catalog changes to product_s 362, logging those changes in file 332. It then checks a flag in catalog 366, and if the flag is on invokes procedure 350

provided catalog_s 360 does not indicate any critical errors. Validate and load procedure 350 then moves the contents of product_s staging table 362 into the appropriate production table 368, writing any errors to processing log 348. (In the event that procedure 364 does not call procedure 350, then buyer 352 intervention is required via GUI 370.) After procedure 364 completes execution, it may either stop, or if catalog 366 has a flag set on and catalog_s staging table 360 indicates no critical errors, then procedure 364 will invoke validation and migration procedure 350. After validate procedure 364 completes, it has written to prod_message_s file 332, and the buyer may use GUI 370 to read messages from file 332 and make any desired changes to staging table 362. They buyer may also choose to reject the catalog and, via step 354, contact the supplier to restart the process. This occurs if there is an error in the unit prices, which is an example of information in the catalog which a buyer is not authorized to change on his own.

After the buyer has used GUI 370 to make the values in staging table 362 acceptable, he sets the flag in staging table 360 which allows migration procedure 350 to run to move data from staging table 362 into production table 368, a relational database, such as Net Commerce (NC) or IBM DB2.

5. Role Table GUI

A preferred embodiment of the invention provides through use of a role table in DB2 database 129 (Figure 3, or 390 in Figure 16) very flexible access to DB2 tables without requiring involvement by a database administrator (DBA) to issue grants against the tables, thus bypassing the problem caused by Notes agents all coming from the same user (the Notes server ID).

Everything in Lotus Notes, even code, is in documents which require access control list (ACL) controls on access. Consequently, the preferred embodiment of the invention uses Notes ACLs to access code. However, when accessing data, a role table 420 (see Figure 19) is used to build roles and permissions, and an object model is provided to generically access data from database 210, thus extending Notes to access a non-Notes data source 210. In order to configure DB2 to work in a Notes application environment, a single sign off is provided after getting through Notes code ACLs. This does not involve use of any of DB2's role tables and grants, but rather a single web ID 434 known to the Notes code to access the DB2 data.

Referring to Figure 19, role table 420 includes for each of a plurality of user WEB ID's 422, the associated role 424 and level 426 of granularity at which the user is associated with the role. Example: for a role 424 of
5 country administrator, the level 426 is the country id, and user with web ID 422 of 02 can update contract profiles for that country.

Any person at a browser 100 attempting to access a row in a DB2 table 390 must pass the role table 420 check.
10 Further, for accessing a supplier table in DB2 390, anyone can view the list of suppliers in the application that applies to the requesters country, but only the country administrator can update them.

User 422 identifies a user profile 430, which specifies
15 the user name 432, web identifier 434, charge information 436, including country, company, work location) and delivery information 438 (including street, office, and building).

Thus, in accordance with the preferred embodiment of the invention, the web ID 434 for the browser user is used
20 to control access to the Notes databases and to the DB2 databases. The Notes databases have code and documents which the user must access (including contract profiles,

cost center profiles) and also tables in the DB2 database. A user must access both Notes databases and DB2 databases, and access to all of these databases is controlled based on the user web ID 434 through the use of role table 420.

5 In order to make and use the preferred embodiment of the invention, an implementer and user would do the following:

- 10 1. Determine what levels of granularity are relevant to the application. (For example, the company that the user belongs to, the country, etc.)
2. Populate the DB2 table 420 with Web IDs 434 and associated roles 424 and levels 426.
3. Write procedures to locate a user 422 in table 420 and pull out associated roles 424 and levels 426.
- 15 4. Provide code routines or functions using these procedures which are authorized for execution by users with specific roles and levels.

Code using these routines would then compare the roles and levels to the specific role and level that is required based

on the function. For example, a user could be defined as a country administrator for France and a company administrator for a small company in the US. A routine that updates accounting information for the small company would not care about the country-level authority, so would look in role table 420 for company administrator role 424 for this user web ID 422. The level 426 of the role 424 would further restrict this user 422 from updating the accounting information for any company in the US other than the one corresponding to the level 426 to which he is assigned.

The invention allows a person's access to DB2 tables to be limited by the contents of a second db2 table rather than the grants issued by the DBA. In the Notes environment of the preferred embodiment of the invention, the ID which is actually granted the authority to the table is the Notes Server machine since the server accessing the db2 tables is the Notes server. Since the user web id is once removed, this provides a mechanism for applying a level of authority to the user to then apply to the db2 table. That mechanism is the role table.

Table 4 lists and describes the Req/Cat Web tables of the preferred embodiment of the invention.

TABLE 4 REC/CAT WEB ADMINISTRATION TABLES

ADMINISTRATION FUNCTION	TABLE	DESCRIPTION
Access Authority	REQCAT.TROLE_AUTHORITY	Maps a user to a role and the qualifier for that role (i.e., what level)
	REQCAT.TROLE_CODE	Defines the list of valid roles - Global Admin, Country Admin, etc
Account numbers	REQCAT.TACCOUNT_PROFILE REQCAT.TLACCOUNT_PROFILE	Holds account codes to be validated against
	REQCAT.TACCT_PROF_DETAIL REQCAT.TLACCT_PROF_DETAIL	Provides details about the account codes
	REQCAT.TACCT_VALIDATION1	Holds account codes to be validated against, as well as what type of validation is occurring (i.e., against BMS, Remind, Project numbers, Customer numbers, etc)
	REQCAT.TACCT_VALID_TYPE	Defines the list of validation types
	REQCAT.TCOMP_COA REQCAT.TLCOMP_COA	Defines the GL account numbers that are available for each company code, and provides a translated description
Approver routing	REQCAT.TAPPROVER_ASSIGN	Links an approver to a type and a code (i.e. I/T 0001)
	REQCAT.TAPPROVER_PROFILE	Defines the approver's name, Web ID, etc.
	REQCAT.TAPPRV_TYPE_PROF	Defines the types of approvers available to the application (capital, financial, I/T, chemical, safety, tax)

ADMINISTRATION FUNCTION	TABLE	DESCRIPTION
	REQCAT.TCATLG_APPROVAL	Allows a catalog administrator to flag a catalog item as requiring chemical or safety approval in specific locations. For example, toner is not considered a chemical item except in Vermont, because of special environmental laws in that state.
Buyer routing	REQCAT.TBUYER_PROFILE	Defines the owner of a buyer code and contact information
	REQCAT.TBUYER_ROUTING	Links a buyer to a commodity
	REQCAT.TBUYER_SUPPLIER	Links a buyer to a supplier
Catalog profiles	RC.CATALOG	Defines the characteristics of a catalog - supplier, expiration date, currency, etc.
	RC.CATPLREL	Defines the plants which are allowed to access this catalog
Commodity families	NC.CATEGORY	Defines the global list of commodity groupings
Commodity codes	RC.COMMOCODE	Defines the global list of commodities and identifies which family each belongs to
Company commodities	RC.COMMCOMP	Not all commodities may be valid for all companies. This table identifies which commodity codes the company wants to use.
	REQCAT.TCOMMCOMP_BUYER	Some commodities require that the user select a buyer from a predefined list. This is the predefined list.
	REQCAT.TCOMM_COMP_COA	This associates GL account codes with the commodity code.

ADMINISTRATION FUNCTION	TABLE	DESCRIPTION
	REQCAT.TCOMM_WLOC_RCV	This defines for which work locations this commodity is 'receivable'. This flag is forwarded to SAP for further use in receiving locations
	RC.SUBCOMMODITY	Some commodities are too broad and the need exists for sub-dividing the goods under this commodity so that different suppliers and different purchase processes can be used.
	RC.SUPPSUBCOMM	This links a supplier to a specific subcommodity.
Companies	RC.COMPANY	Associates SAP company codes with associated country. For example, IBM US contains three company codes for IBM, Lotus, and Tivoli.
Countries	RC.COUNTRY	Holds the list of ISO country codes, i.e., US, FR, DE, etc
Company groups	REQCAT.TCOMPGRP_TYP_PROF	Defines the list of valid grouping types, such as ACCOUNT, UPROF
	REQCAT.TCOMPGRP_PROFILE	Defines the list of group names and links them to their types, such as IBMUS - ACCOUNT and IBMUS - UPROF
	REQCAT.TCOMPANY_GROUPING	Lists the company codes that belong to the specified grouping
Plants	RC.PLANT	Associates plant codes with company and country. A company can have many plants, a plant may belong to only one company.
Suppliers	RC.SUPPLIER	Defines the characteristics of a supplier - name, code, contact information, location

ADMINISTRATION FUNCTION	TABLE	DESCRIPTION
	RC.SUPPCOMP	Defines which company codes may reference this supplier for purchasing
Work locations	REQCAT.TWORK_LOCATION REQCAT.TLWORK_LOCATION	Associates work locations with plant, company, and country. A plant can have one or more work locations, a work location may belong to only one plant.
	REQCAT.TWORKLOC_DELTOADDR	For those work locations which have a predefined CDC (Chemical Delivery Center) address
User profiles	REQCAT.EMPLOYEE_PROFILE	Holds employee information
Catalog parts	see Figure 18, DB2 NCF tables 368	Hold part information, category / subcategory information, etc.

6. Relational DB Agents

In accordance with a preferred embodiment of the invention, in a Notes/DB2 hybrid environment, a Notes agent reads data from a DB2 table, and then dynamically populates that data to an HTML page. In this manner, an the existing infrastructure (including Notes, Domino Go, and DB2) is used to combine HTML and Java script web presentation with DB2 data.

Referring to Figure 20, Notes agents 440 are used as intermediaries. Each such agent 440 reads DB2 tables 390, collects data using SQL select statements, and builds web page 442 dynamically, writing out the Java script and HTML to present the page on a Web browser, such as Web browser 100. The results of the DB2 searches also helps to determine which HTML needs to be written, something which standard HTML cannot handle. Thus, conditional logic may be used.

A plurality of agents 440 are provided. The premise is the same in all: figure out who is asking, and then tailor what is shown by what they are authorized to see. The example of Table YY is the supplier profile agent.

This process makes use of the Notes connection function `lsx:lc`. This Lotus Script connection is a built in API for connectivity to relational databases. The `lsx:lc` connector is a Lotus provided API which allows connection to DB2.

For example, to display a list of supplier profiles, two DB2 tables 390 must be read: one provides a list of suppliers and the other is role table 420 (Figure 19). When role table 420 is read, the code tests the users ability to edit (country admin for country of supplier), and may

display the web page differently depending thereon. A dynamic feature of the invention is that straight text may be displayed, or with text with hyperlinks to open a supplier profile, as an example.

5 To make and use this preferred embodiment of the invention, the following is done:

1. Use the Lotus Script lsx:lc connector connect to DB2.
2. Depending on the DB2 table being read and the functions required, write functions to Create, Read, Update, and Delete with respect to the DB2 table.
3. Write the HTML to display the page, and then have the Notes agent 440 Print these HTML commands to the browser so that they appear in a meaningful presentation to the end user.
4. Use conditional logic to change the look of the page 442 based on the results of the DB2 390 lookups.

Inputs to the method of this embodiment of the invention include the DB2 table to be read or updated, and the output includes HTML conditionally generated based on

results of the DB2 table reads.

The HTML page being populated may, for example, provide a list of suppliers. Such pages may also be used in the requisition or configuration area of the application, displaying commodity codes, suppliers, and so forth.

TABLE 5 EXAMPLE AGENT 440

This agent is invoked from the administration tab for 'supplier'. It is presenting the user with a view of suppliers that have been configured on the system. Based on the access authority of the user, this list will be presented either as just text, for the general user, or as hotlinks for an administrator to then open an individual supplier profile and update it.

```
Sub Initialize
//setting up variables
  Dim src As New LCConnection ("db2")
  Dim fldLst As New LCFieldList(100)
  Dim suppname As LCField
  Dim suppcode As LCField
  Dim InfoView As AllInfoView
  Dim session As New NotesSession
  Dim doc As NotesDocument
  Dim sqlQueryString As String
  Dim flag As Variant
  Dim admin As Integer
  Admin=True
  Dim lclsxSession As LCSession
  Dim supplierdb As notesdatabase
  Dim configview As notesview
  Dim configdoc As notesdocument
  Dim lookuptype As String

  On Error Goto errHandler

  Set supplierdb=session.currentdatabase
  Set configview = supplierdb.getview("APPVIEW")
  Set configdoc = configview.getfirstdocument
  lookuptype = configdoc.HRFormat(0)

  Set doc=session.DocumentContext
  Set InfoView=New AllInfoView

//connect to DB2
```

```

37         InfoView.ConnectToDB2
38     //Query the role table for users roles and authority levels
39     If Not InfoView.CheckAdminPrivilegesOK (doc.CurrentUserName(0))Then
40         Admin = False
41     End If
42     InfoView.DisconnectDB2
43
44     If (Admin = False) And (lookuptype = "DON")Then
45         Print"<script>alert('You are not authorized to view Supplier
46 documents Please contact your procurement administrator if you have
47 questions');"
48         Print "history.go(-3)</script>"
49         Exit Sub
50     End If
51
52     //Begin printing out HTML from the agent
53     Print "<link rel=stylesheet type='text/css' href='"/transform
54 /reqcat/css/default_styles.css">"
55
56     Dim db2c As New db2config(session)
57
58     //Connect to DB2
59     src.database = db2c.getDB2DatabaseName() "reqcat41"
60     src.Connect
61
62     //build the SQL Query
63     sqlQuerystring = "select Surname, SUID from RC.SUPPLIER"
64     sqlQueryString = sqlQueryString & " order by Surname"
65
66     If (src.execute(sqlQueryString, fldLst) = 0) Then
67         Print "You do not have any supplier profiles to view."
68     End
69 End If
70
71 Set suppname = fldLst.Lookup ("Surname")
72 Set suppcode = fldLst.Lookup ("SUID")
73
74 //Print more HTML
75
76 Print "<TABLE width='100%' cellpadding='0' cellspacing='0'>"
77     Print "<BR><TR><TD class='\""banner\"" bgcolor='\""3366cc\"" align=
78 \"center\"> Suppliers</TD></TR>"
79
80     Print "</TABLE>"
81
82 //If the user is an admin, then provide a button for adding new
83 suppliers
84
85 If Admin Then
86     Print "<form>"
87     Print "<input type='button' name='mybutton' value='Add
88 Supplier Profile' onClick='\"javascript: document.location.href=
89 './SUPPLIER?OpenForm';\" >"
90     Print "</form>"

```

```

88         Else
89             Print "<BR>"
90         End If
91
92         Print "<table cellpadding=2 cellspacing=0 border=0>"
93         Print "<tr><td class=""bannersublevel"" ><B> Supplier</B></td>"
94         Print "</tr>"
95
96     //Toggling background color on alternate rows
97
98     flag = True
99
100    While (src.Fetch (fldLst) > 0)
101        If (flag) Then
102            Print "<tr bgcolor=#CCCCCC>"
103            flag = False
104        Else
105            Print "<tr bgcolor=#FFFFFF>"
106            flag = True
107        End If
108
109    //If user is an admin, then print the supplier name as a hotlink
110
111    If Admin Then
112        Print"<td class=""field""> <a href=./SUPPLIER?OpenForm&"
113        & suppcode.text(0) & ">"&suppname.text(0)&"</a> </td>"
114        Else
115
116    //otherwise just print it as text
117
118        Print"<td class=""field"">" &suppname.text(0)&"</td>"
119        End If
120        Print"<td class=""field"">" &suppcode.text(0)&"</td>"
121        Print "</tr>"
122    Wend
123    Print "</table>"
124    End
125
126    errorHandler:
127
128    Print "<br>" & session.currentagent.name & " - Line # " &Str(Erl)
129    & " // Error " & Str(Err) & ": " & Error$
130    If (lclsxSession.Status <> LCSUCCESS) Then
131        Dim text As String
132        Dim extcode As Long
133        Dim exttext As String
134
135        Call lclsxSession.GetStatus (text, extcode, exttext)
136        If (lclsxSession.Status = LCFAIL_EXTERNAL)Then
137            Print "<br>DB2 message: " & exttext & " code #" &
138            Cstr(extcode)
139        Else
140            Print "<br>Connector message: " & text
141        End If
142    Else
143        Print Error$
144    End If

```


7. Data Transfer

In accordance with the preferred embodiment of the invention, a system and method is provided for transferring to a Req/Cat Web (RCW) application in a timely manner large quantities of data from web sites that exist outside of a
5 firewall, or internal applications within the firewall but outside of the Req/Cat Web application.

For the purpose of the description of this embodiment, RCW exists in a frame set in a browser. A frame set divides
10 a screen into logical and user-friendly sections called frames. As part of security for browser 100, Netscape and Internet Explorer (IE) establish ownership of the frames: each frame is a window under control of browser 100. Browser 100 can open up a session in any frame desired.
15 However, if all of the frames open on a browser are not owned by same session, then these frames cannot see the contents of each other.

Consequently, the problem is presented: if RCW needs to access an outside supplier site 300 for information to get
20 back through one its own the frames, as soon as data is

written by that other site into one of the frame at browser 100, RCW no longer owns the frame and cannot access the information. So this aspect of the invention is concerned with data passing.

5 In accordance with the preferred embodiment of the invention, the supplier 300 opens a new window through normal Java script commands and writes its data into it, along with the name of the agent to run in RCW application server 114. That new window then calls one of the RCW
10 processes, which is able to see the data because it is not in a frame and is therefore available for RCW to access. That process causes an agent to runs (in RCW) that can see that data and write it to a frame on the RCW side, resulting in RCW owning both the data and the frame. This allows RCW
15 to reach NOTES information, and write that information to other frames. RCW owns the data and the frame. Ownership is established in the RCW application.

Consequently, by carefully tracking and controlling the sequence of opening windows, RCW can establish the origin
20 from which data is coming, where the data is going, and which process owns it.

Those are the high points. Review: two sites are

talking to each other using an intermediate window, doing a handoff of data and of ownership of both data and frame such that when it is time to supply information to the RCW application, RCW owns the data, frame and process.

5 Referring to Figure 21, a system and method are provided for data transfer from a externally owned site to an application owned frame set which operates as follows. The RCW application opens a supplier site URL in a temporary frame 456. Upon user selection of go to supplier 451, as is
10 represented by step 458, frame 456 opens the supplier window 460 as a separate browser session. Two windows are now open: the original application 450 with its window underlying, and a supplier window 460 over it with the supplier URL. The reason for doing this is that the
15 supplier requires that the browser be full frame, not in a small frame set. The primary RCW application in window 450 is quiesced to a wait state. As is represented by steps 462, the user can now select from window 460 items to buy, search, or whatever the supplier deems is appropriate for a
20 user to order his data. The user then issues the command to submit the order. In step 444, the supplier site then gathers content from order data entered at window 460, in step 446 formats the page, and in step 448 issues a call to Req/Cat Web to open third window 464 with first agent 480.

The supplier uses an enterprise specified agent name for first agent 480 when opening third window 464. Third window 464 is a window, but not a frame, and thus the Req/Cat Web can get access to it even though it is opened by the supplier. First agent 480 includes an html form command 488 which defines the processing to be done on the contents 466 of the form now displayed in third window 464, and the supplier site writes into this third window 464 unique order identifying information. Once written, the browser activates the form. Once activated, it is a program in its own right, the html 488 that was written and any java script in it will execute. One of first things it does is look at the action in the form command and determine that this is the program that will run to deal with the contents of this form. That action program, or first agent 480, is a RCW action program on the RCW server that can see contents of third window 464 because it is not in a frame, and thus ownership is not critical. In step 482, first RCW agent 480 executes a program or process that writes the contents 466 of window 464 back into its frame set (temporary frame) 456, and then calls second agent 484 which references Java script code 454 and, as is represented by step 486, access Notes data on the Notes server, add content to the requisition, and issue the commands that send the order to be stored in the requisition. This is key, Req/Cat Web has used its own

process 480 to write into its own window 450, and knows who owns the data. First agent 480 process opened window 464 and writes the data to temporary frame 456 and then kicks off another process, second agent 484, that can read that data, can read and write to all of the frames 452 in the application, can access information from Lotus notes, and write all the information into the requisition.

Window 460 is provided by a supplier site from outside the application, and possibly also outside a firewall.

Window 460 is an external application that allows execution of code 462 for performing search, select, submit (call enterprise server, which may be inside firewall), and order data, including gather content 444, formatting the page 446, and calling RCW 448 with the first agent 480 as an action form.

Window 464 is a window opened by the supplier to include a Req/Cat Web agent, first agent 480. First agent 480 posts document contents to temporary data frame 456. As a variation, for skills matching, calls are made to the agents 480, 484 with a parameter after placing the data to retrieve in a Notes database. The second agent 484 retrieves the data, can look up and add supporting data from yet another Notes database.

The key consideration here is, "who owns the frame".
The server that owns the agent that last wrote a frame owns
it, and can see its content, but cannot see any other
frame's contents if they were written by another server's
5 programs or agents.

Window 464 and first agent 480 act as an intermediary.
Content 466 is owned by the supplier server 300, but the
first agent 480 is owned by the Req/Cat Web server 114.
That first agent 480 then kicks off the rest of the process,
10 passing the data and ownership to the RCW server 114 and the
second agent 484. The second agent 484 can now can access
Notes data on the Notes server 112, and issue the commands
that send the order to be stored in the requisition.

8. Customizable Side Bar

15 In accordance with the preferred embodiment of the
invention, a customizable side bar is provided. Dynamic
HTML is used by the navigator responsive to user input to
change data presented at the screen without having to
communicate with a remote server.

Referring to Figure 4, navigation frame or menu bar appears, typically, on the left of a display window, to display a plurality of menu boxes, including headers 491-494 and items 495-500. As a cursor is moved over the headers, each individual header is highlighted or some symbol 481, 483, 485, 487, respectively, rotated by, say, 45 degrees, so as to point either down or to the right, to indicate to the user the header which will, upon being clicked, toggled to either a collapsed or expanded state from its current expanded or collapsed state, respectively. As illustrated, headers 481 and 483 are in a collapsed state, and headers 485 and 487 are in an expanded state. When expanded, header 485 is expanded to show items 495-498, and header 487 to show items 499-500. The user may move the cursor to one of items 495-500, and select the item to update the data displayed in content frame 480.

Heretofore, when the user selects (clicks on) a menu header 491, there is generally a pause as the request is made to the server to obtain a new page including an expanded menu bar 472 including a display of the included items. In accordance with a preferred embodiment of the invention, when server loads the window to a client, all of the information required to load the menu bar 472 is provided, including information for the expanded menu items

(but not the content frame associated with them). If a menu header 485 is clicked when in the collapsed state, the menu items 496-498 are shown or made visible and the following menu headers and items are moved relative to the expanded menu bar. If a menu item 496 is clicked, then communication with the server is required to load the content frame 480.

Upon initial load, all headers 491-494 are collapsed and all menu items are hidden. Menu headers 491-494 are displayed below each other with no gaps between them.

Clicking on a last menu header merely shows all the menu items and moves nothing below it. Clicking on the first menu header would show all of its items and move every header and item a constant amount without changing its visibility state. (The display area 472 may be off of the window, but is available via the scroll bar 490.) In accordance with this embodiment of the invention, the result of selecting a header 491-494 is an instantaneous response from the client browser either expanding or collapsing the selected header and respectively displaying or removing from display the included items.

This is done using dynamic html (dhtml), which allows creation of divisions within a document. These divisions are equivalent to tab items, menu items 495-500, or headers

491-494. In Netscape, these divisions are called layers.
In Explorer, the layers are called divisions. These
divisions can be hidden or shown, and moved relative
distances on the screen. The current state of the art is to
5 use these divisions for moving or flashing graphics, but not
for business applications such as menu bars. In accordance
with the present invention dhtml at the client creates
subtle changes, business like, in the menu bar 472 without
requiring server communications. The use of dhtml is
10 described at developer.netscape.com.

Java script code, executable at a client for inserting,
showing, moving and updating a menu bar 472, is illustrated
in Table 6.

TABLE 6 MENU BAR CODE

```
1  ---- JavaScript (appNav.js)  -----
2  // appNav Class Constructor
3  -----
4  // This class implements a JavaScript Object intended to represent the
5  Navigator function   appNav(menuVar)  {
6
7      //methods
8      this.init = appNavInit;
9      this.sizeit = appNavSizeit;
10     this.toggletext = appNavToggleText;
11     this.isItem = appNavIsItem;
12     this.reverse = appNavReverse;
13
14     // properties
15     this.ns = document.layers;
16     this.ie = document.all;
17
18     this.loaded = 0;
19     this.whichone = 0;
20     this.whichgroup = 0;
```

```

18         if ( this.ns ) {
19             this.show = 'show';
20             this.hide = 'hide';
21         } else {
22             this.show = 'visible';
23             this.hide = 'hidden';
24         }
25         this.menus = menuVar;
26         this.max = menuVar.length;
27         this.images = new Array(this.max);
28         this.menuMove = new Array(this.max);
29         for (i=0;i < this.max; i++) this.menuMove[i] = 20 * (menuVar[i] -
30 1);
31         this.tabShow = [false, false, false, false, false, false, false,
32 false];
33     }

34     function appNavInit() {
35         var k=0;
36         if (this.loaded == 0) {
37             for (i=0; i < this.menuMove.length; i++) {
38                 this.images[i] = new Array(this.menus[i]);
39                 for (j=0; j < this.menus[i]; j++) {
40                     this.images[i][j] = new Image();
41                     pos = ("0"+i).slice(i>9,2) + ("0"+j).slice(j>9);
42                     this.images[i][j].src = "../images/men" + pos
43 + ".gif"
44                     if (this.ie) {
45                         document.images[k].src=this.images[i][j].s
46 rc;
47                         k++;
48                     } else
49                         document.layers["D"+pos].document.images[0
50 ].src=this.images[i][j].src;
51                     }
52                 }
53                 this.loaded=1;
54             }
55         };

56     function appNavSizeit() {
57         if (this.loaded==1) {this.loaded = 0; this.init();}
58     };

59     function appNavToggleText(z) {
60         if (this.loaded==1) {
61             this.tabShow[z] = !this.tabShow[z]
62             for (j=1; j<this.menus[z]; j++) {
63                 pos = ("0"+z).slice(z>9) + ("0"+j).slice(j>9);
64                 if (this.ie)
65                     text = document.all("D"+pos).style
66                 else
67                     text = document.layers["D"+pos]
68                 if (this.tabShow[z])
69                     text.visibility = this.show;
70                 else
71                     text.visibility = this.hide;
72             }
73             for (i=z+1; i<this.max; i++) {

```

```

74         for (j=0; j<this.menus[i]; j++) {
75             pos = ("0"+i).slice(i>9) + ("0"+j).slice(j>9);
76             if (this.ie) {
77                 text = document.all("D"+pos).style
78                 if (this.tabShow[z])
79                     text.pixelTop += this.menuMove[z]
80                 else
81                     text.pixelTop -= this.menuMove[z]
82             } else {
83                 text = document.layers["D"+pos]
84                 if (this.tabShow[z])
85                     text.top += this.menuMove[z]
86                 else
87                     text.top -= this.menuMove[z]
88             }
89         }
90     }
91 }
92 };

```

Advantages over the Prior Art

It is an advantage of the invention that there is
 95 provided a scalable database system in a web environment
 with optimal access performance characteristics for an
 expanding number of clients and a growing database.

It is an advantage of the invention that there is
 provided a system and method for enabling a requester to
 100 select the correct general ledger account when doing
 financial validation on a requisition.

It is an advantage of the invention that there is

provided a system and method for utilizing Lotus script
extensions in combination with a relational database to
105 provide high capacity storage without performance
degradation.

It is an advantage of the invention that there is
provided a system and method for enabling a buyer a means
for editing catalog content before externalizing it to
110 production for access by requesters.

It is an advantage of the invention that there is
provided a system and method for providing very flexible
access to DB2 tables without requiring database
administrator (DBA) involvement to issue grants against the
115 tables, and bypassing the problem caused by Notes agents all
coming from the same user (the Notes server ID).

It is an advantage of the invention that there is
provided a system and method utilizing an existing
infrastructure including Lotus Notes, Domino Go, and DB2 to
120 combine HTML and Java script web presentation with DB2 data.

It is an advantage of the invention that there is
provided a system and method for enabling transfer of data
from a supplier site to a RCW application which does not

entail frame spoofing.

125 It is an advantage of the invention that there is
provided a system and method for dramatically increasing the
speed of operation of a navigation frame of a GUI.

Alternative Embodiments

130 It will be appreciated that, although specific
embodiments of the invention have been described herein for
purposes of illustration, various modifications may be made
without departing from the spirit and scope of the
invention. In particular, it is within the scope of the
invention to provide a computer program product or program
135 element, or a program storage or memory device such as a
solid or fluid transmission medium, magnetic or optical
wire, tape or disc, or the like, for storing signals
readable by a machine, for controlling the operation of a
computer according to the method of the invention and/or to
140 structure its components in accordance with the system of
the invention.

Further, each step of the method may be executed on any

145 general computer, such as an IBM System 390, AS/400, PC or
the like and pursuant to one or more, or a part of one or
more, program elements, modules or objects generated from
any programming language, such as C++, Java, Pl/1, Fortran
or the like. And still further, each said step, or a file
or object or the like implementing each said step, may be
150 executed by special purpose hardware or a circuit module
designed for that purpose.

155 Accordingly, the scope of protection of this invention
is limited only by the following claims and their
equivalents.

CLAIMS

We claim:

1 1. A method for creating a valid chart of accounts from
2 which an administrator can facilitate and enable a
3 requisitioner to select a valid general ledger account,
4 comprising the steps of:

5 pushing from an enterprise system a chart of accounts
6 with descriptions to a requisition catalog system
7 database;

8 administrator selecting from said requisition catalog
9 system database valid accounts with descriptions for a
10 given commodity and purchase period; and

11 administrator then pushing a selected
12 account/description tuple to company commodity groups
13 for use in a requisition creation process.

1 2. The method of claim 1, further comprising the steps of:

2 requisitioner searching against commodities and
3 catalogs in commodity description documents and
4 responsive thereto, creating one or more line items.

1 3. The method of claim 2, further comprising the steps of:

2 administrator creating a company commodity document
3 including for each commodity code under each company, a
4 commodity category code, a short description, a long
5 description, key words, approvers, financial
6 information, route-to buyer by plant association,
7 preferred supplier, special handling codes all usable
8 for enabling customer selection of a correct commodity;

9 requisitioner initiating a proceed to accounting
10 process, which displays line items which may be
11 selected by said requisitioner; and

12 displaying an agent created financial worksheet with
13 fields which need to be selected or populated by
14 requisitioner derived from company commodity document,
15 based on purchase type, thereby presenting valid

16 general ledger accounts numbers and descriptions to
17 said requisitioner.

1 4. A method for validating zip code entries on a
2 requisition, comprising the steps of:

3 providing a database of valid zip codes;

4 responsive to entry of a zip code on a requisition or
5 to the changing of delivery information which includes
6 zip code on a requisition line item, validating the zip
7 code against said database.

1 5. The method of claim 4, said validating step comprising
2 determining that a new or changed zip code exists as a valid
3 zip code in said data base.

1 6. The method of claim 4, said validating step comprising

2 determining that said new or changed zip code exists
3 matches a valid zip code in said data base and that it
4 is valid zip code per state, city and zip code; and

5 said providing step includes initializing said data
6 base with valid zip codes from a trusted source thereby
7 enabling validation of a zip code with respect to state
8 and city.

1 7. A requisition catalog system for a large enterprise in
2 a web environment, comprising:

3 application server means for insuring that all general
4 ledger accounts associated with commodities in a
5 relational database are correct; and

6 said application server means also for providing a
7 description mapping account codes to commodity codes
8 from an associated accounting system for use by a
9 requester to select the correct general ledger account
10 when doing financial validation on a requisition for
11 said commodities.

1 8. A method for validating a requisition in a requisition
2 catalog system for a large enterprise in a web environment,
3 comprising the steps of:

4 matching general ledger accounts associated with
5 commodities in a relational database; and

6 displaying to a user a mapping of account codes and
7 descriptions to commodity codes from said relational
8 database, thereby enabling said user to select a
9 correct general ledger account when validating said
10 requisition.

1 9. A method for managing a chart of accounts, comprising
2 the steps of:

3 displaying to an administrator an accounting system
4 generated chart of accounts, said chart including for
5 each account an account identifier and commodity
6 description;

7 responsive to administrator selection, pushing a
8 selected commodity description and account identifier
9 to a company commodity group document together with
10 information enabling a user to select a correct
11 commodity.

1 10. The method of claim 9, said information including
2 commodity description, approvers, general ledger account,
3 route-to buyer, and preferred supplier.

1 11. A program storage device readable by a machine,
2 tangibly embodying a program of instructions executable by a
3 machine to perform method steps for managing a chart of
4 accounts, said method steps comprising:

5 displaying to an administrator an accounting system
6 generated chart of accounts, said chart including for
7 each account an account identifier and commodity
8 description;

9 responsive to administrator selection, pushing a
10 selected commodity description and account identifier
11 to a company commodity group document together with
12 information enabling a user to select a correct
13 commodity.

1 12. A program storage device readable by a machine,
2 tangibly embodying a program of instructions executable by a
3 machine to perform method steps for validating a requisition

4 in a requisition catalog system for a large enterprise in a
5 web environment, said method steps comprising:

6 matching general ledger accounts associated with
7 commodities in a relational database; and

8 displaying to a user a mapping of account codes and
9 descriptions to commodity codes from said relational
10 database, thereby enabling said user to select a
11 correct general ledger account when validating said
12 requisition.

1 13. A program storage device readable by a machine,
2 tangibly embodying a program of instructions executable by a
3 machine to perform method steps for validating zip code
4 entries on a requisition, said method steps comprising:

5 providing a database of valid zip codes;

6 responsive to entry of a zip code on a requisition or
7 to the changing of delivery information which includes
8 zip code on a requisition line item, validating the zip
9 code against said database.

1 14. A program storage device readable by a machine,
2 tangibly embodying a program of instructions executable by a
3 machine to perform method steps for creating a valid chart
4 of accounts from which an administrator can facilitate and
5 enable a requisitioner to select a valid general ledger
6 account, said method steps comprising:

7 pushing from an enterprise system a chart of accounts
8 with descriptions to a requisition catalog system
9 database;

10
11 administrator selecting from said requisition catalog
12 system database valid accounts with descriptions for a
13 given commodity and purchase period; and

14 administrator then pushing a selected
15 account/description tuple to company commodity groups
16 for use in a requisition creation process.

1 15. A computer program product or computer program element
2 for executing the steps comprising:

3 pushing from an enterprise system a chart of accounts
4 with descriptions to a requisition catalog system

5 database;
6
7 administrator selecting from said requisition catalog
8 system database valid accounts with descriptions for a
9 given commodity and purchase period; and
10
11 administrator then pushing a selected
12 account/description tuple to company commodity groups
for use in a requisition creation process.

13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229
2230
2231
2232
2233
223

**SYSTEM AND METHOD FOR FRONT END BUSINESS LOGIC AND
VALIDATION**

Abstract of the Disclosure

A hybrid Notes/DB2 environment provides a requisition
5 catalog on the Web. Client browsers are connected to a GWA
infrastructure including a first network dispatcher and a
virtual cluster of Domino.Go servers. The network
dispatcher sprays out browser requests among configured
10 .nsf servers in virtual server cluster. Communications from
this virtual server cluster are, in turn, dispatched by a
second network dispatcher servers in a Domino cluster.
External objects, primarily for a GUI, are served in a .dfs
and include graphic files, Java files, HTML images and
15 net.data macros. The catalog is built from supplier
provided flat files. A front end is provided for business
logic and validation, as also is a relation database
backend. HTML forms are populated using relational database
agents. A role table is used for controlling access both to
20 Notes code and DB2 data. Large amounts of data is quickly
transferred using an intermediate agent and window.

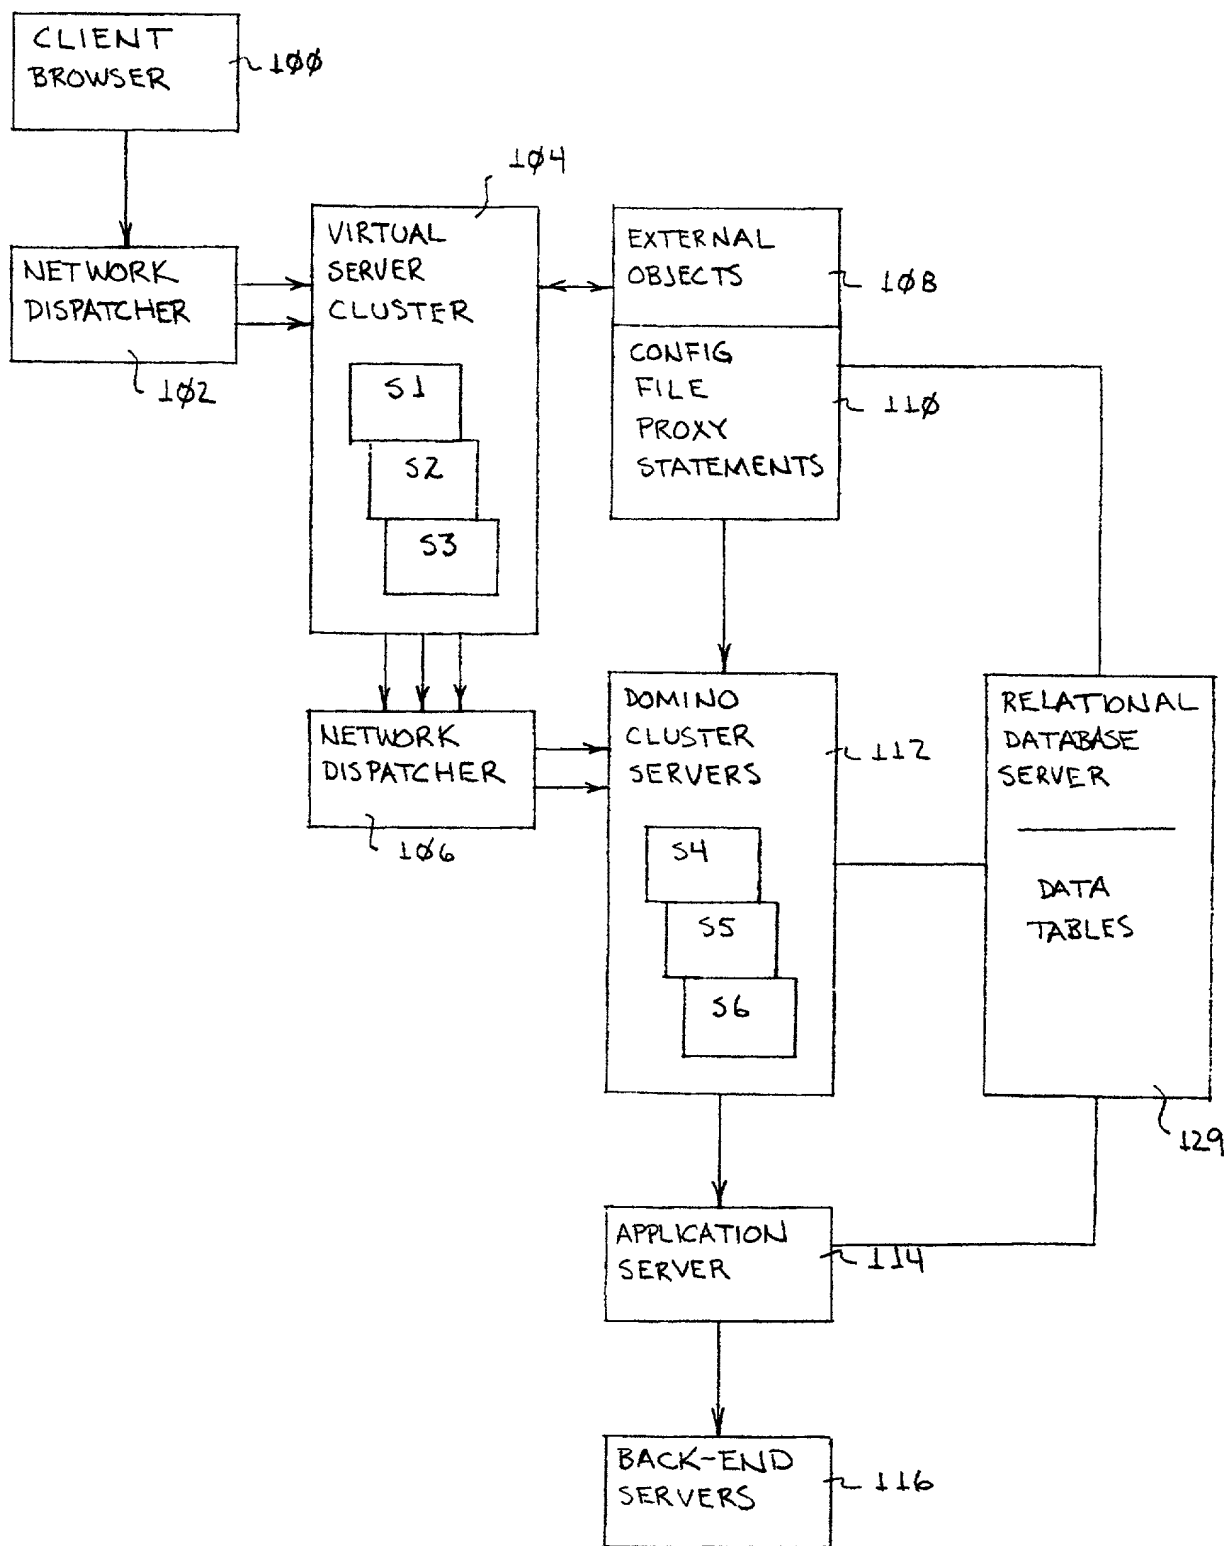


FIG. 1

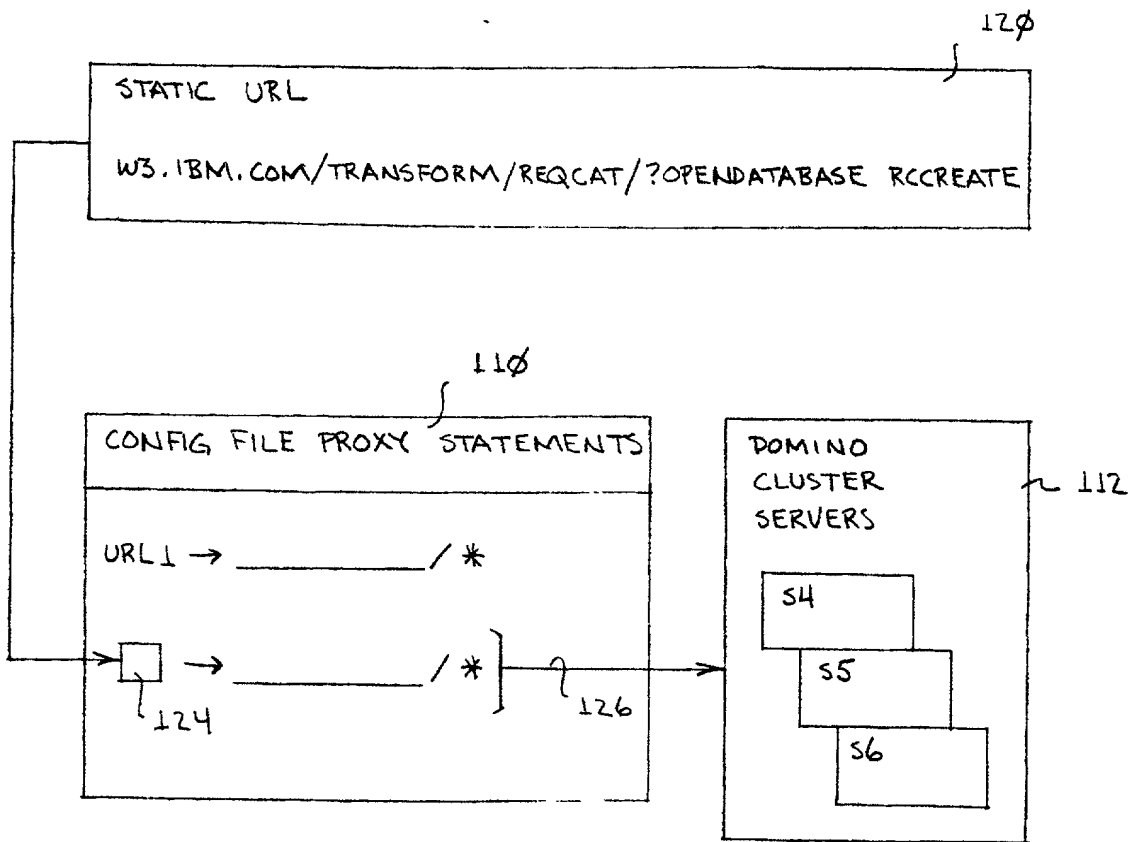


FIG. 2

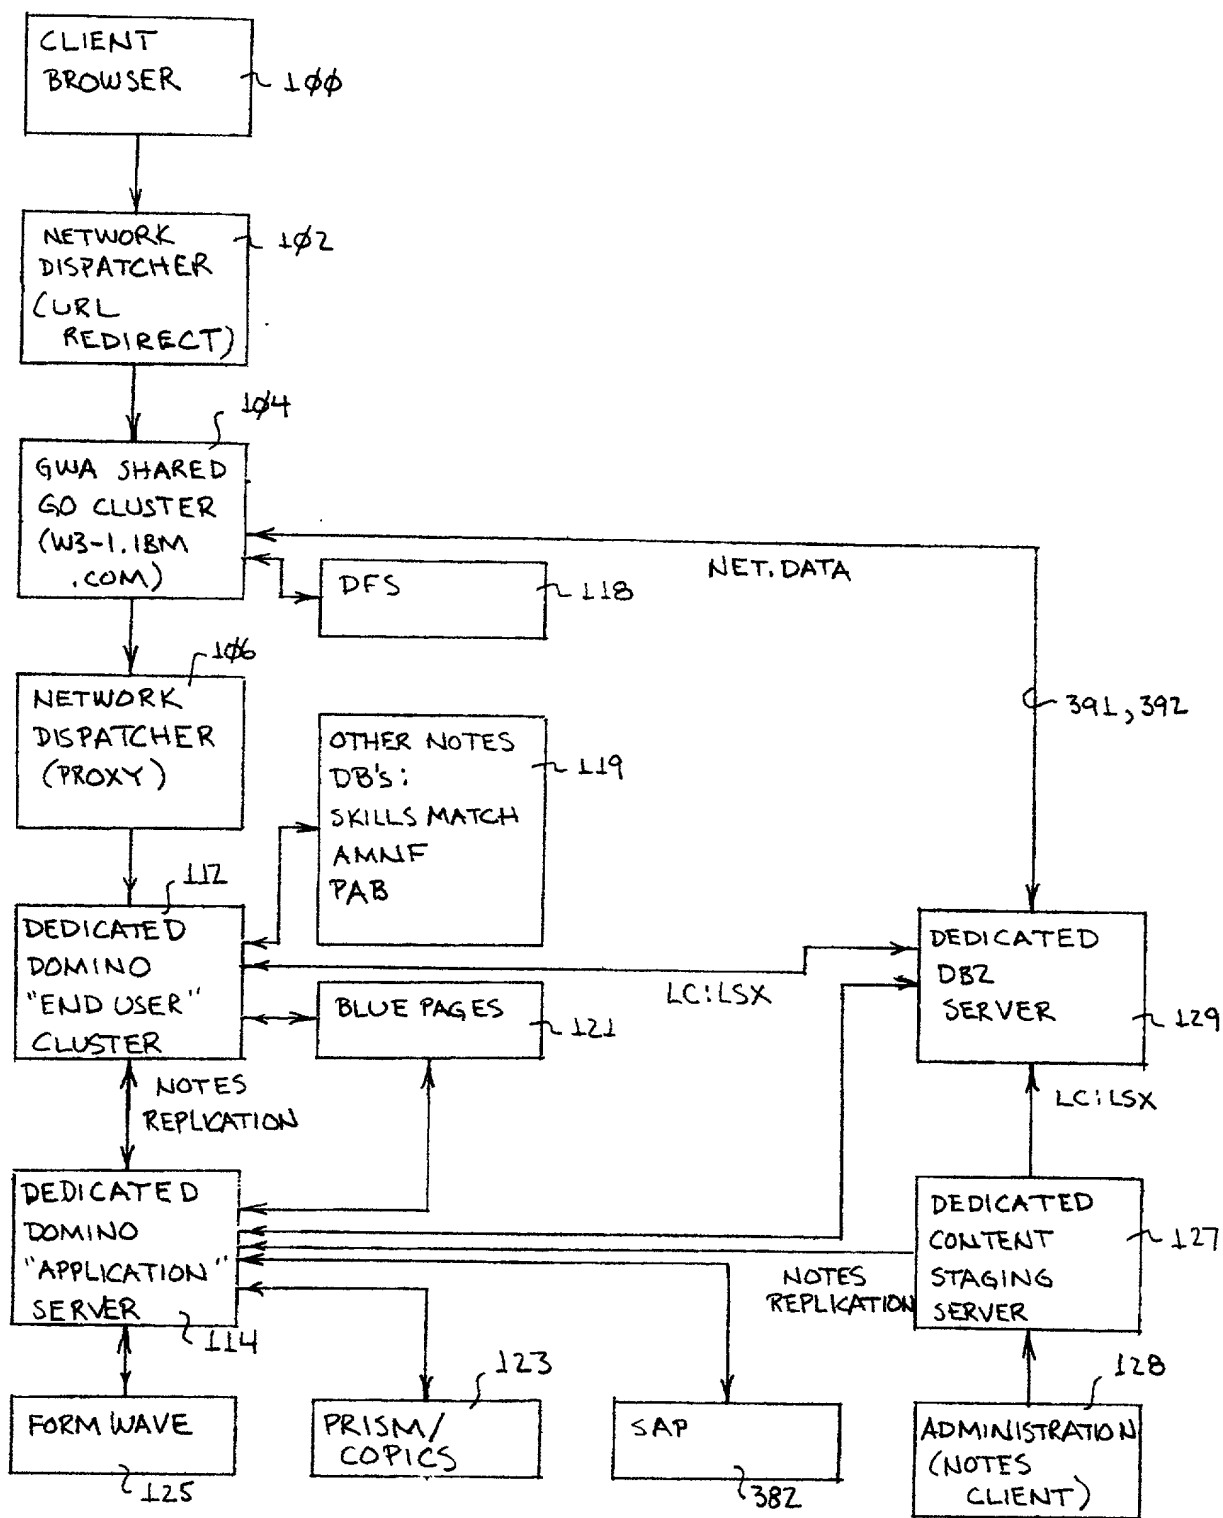


FIG. 3

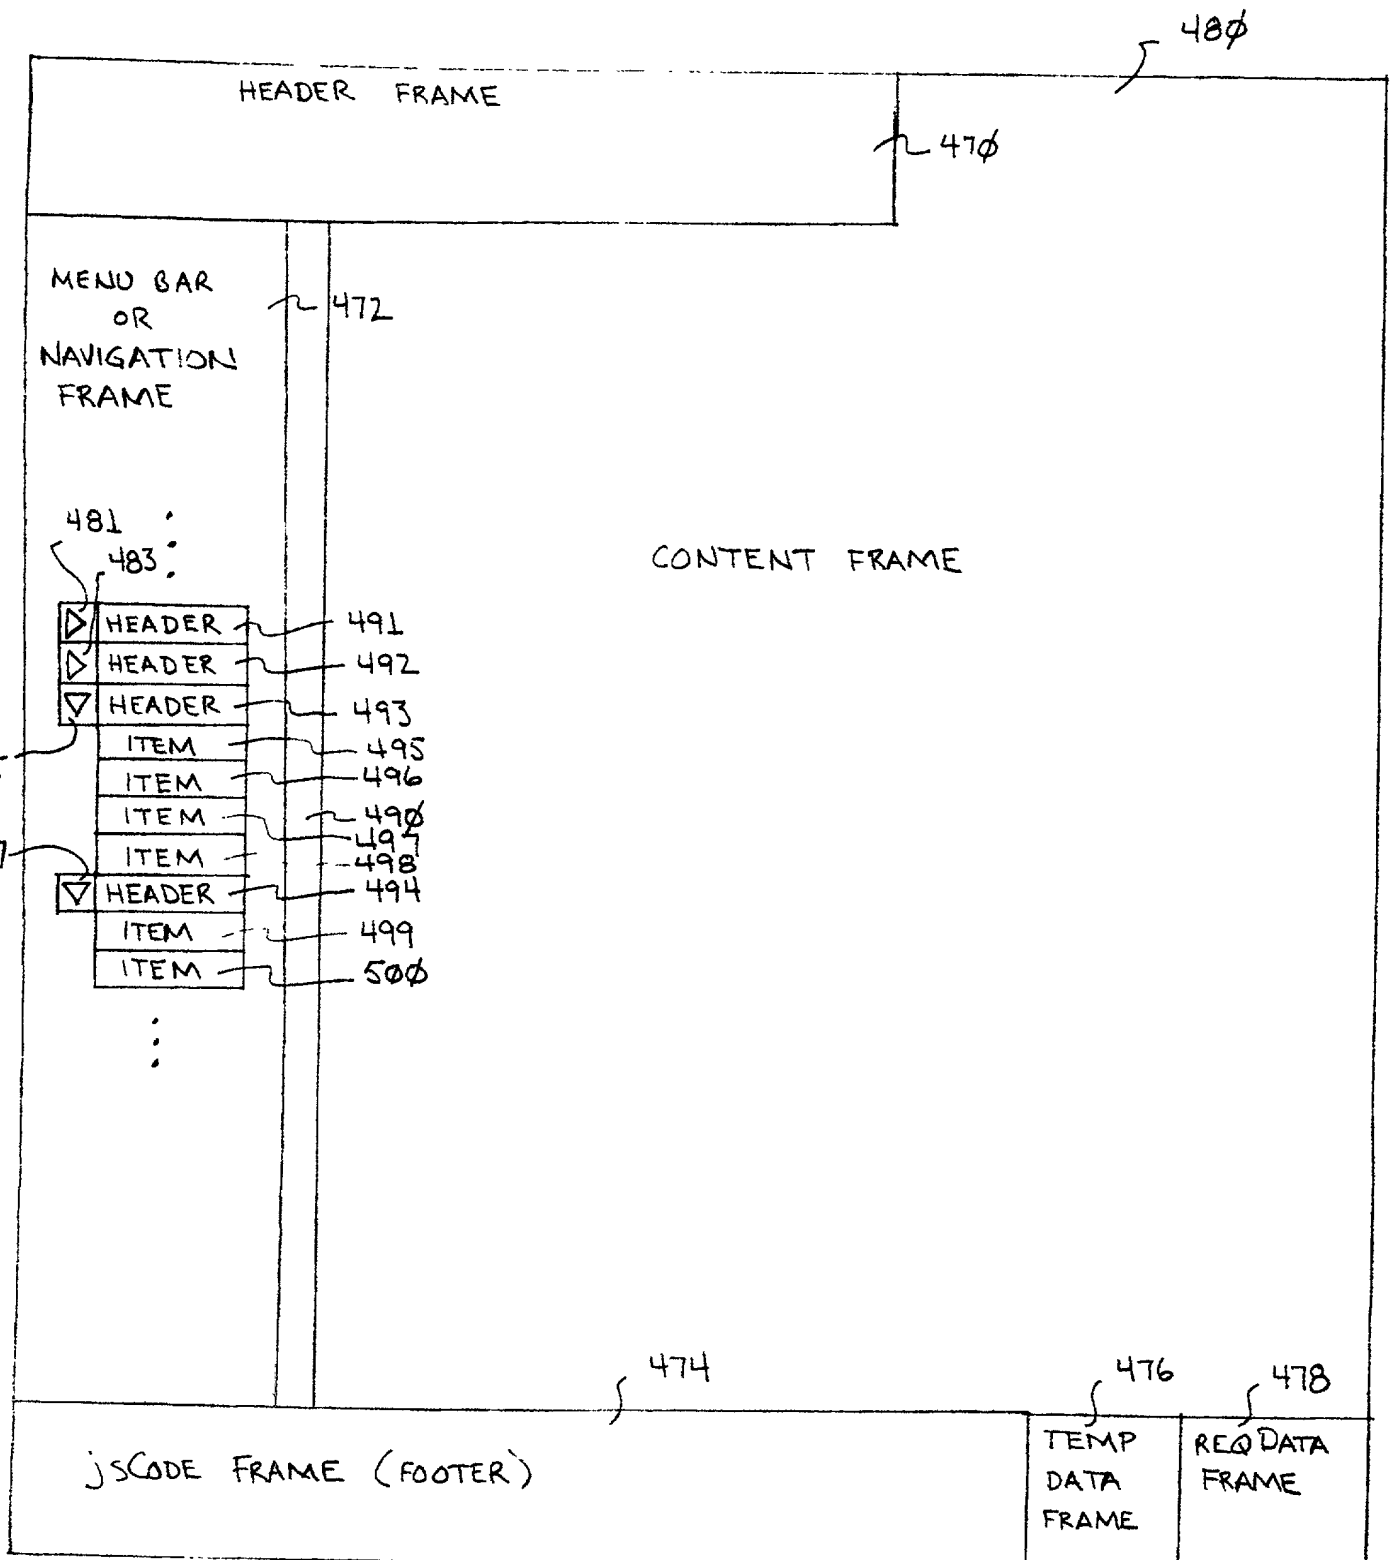


FIG. 4

IBM		Reg/Cat Web		470		480	
* Create Requisition		Purchase Request					
* New New RFA From Draft From Rej Req From Template From Comp RFA		Requisition Summary Request Status: Request ID: Request Date: Internal/Resale: Total Price:					
* View Requisitions		Requester Summary:					
* For Approvers Only		Requester Name:					
* Users		Initiator:					
* Administration		Country:					
		Company:					
		Plant:					
		Department:					
...		Requisition Items:					
		472					
		Shop For Terms					
		Change Requester					
		Close					
		474					
www.ibm.com	About IBM	Support	Search	Feedback	www.ibm.com	temp Data	476 478 req Data

FIG. 5

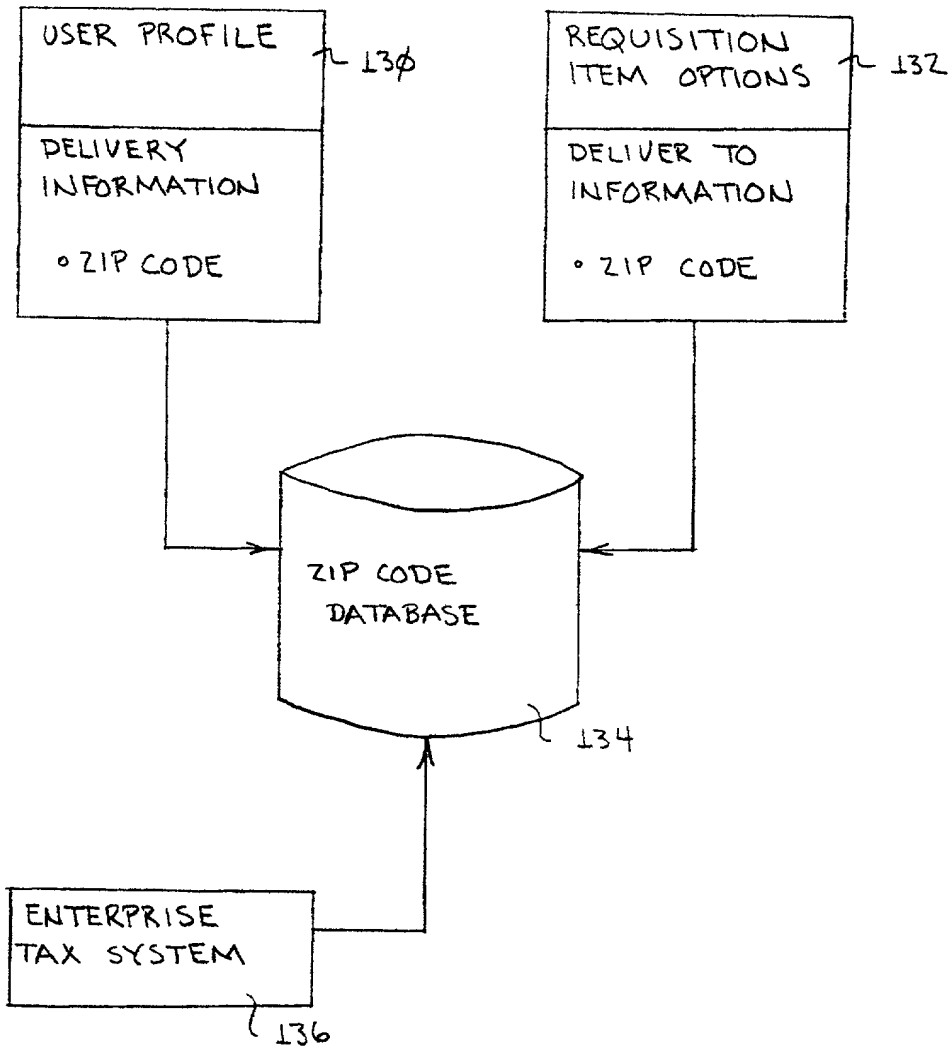


FIG. 6

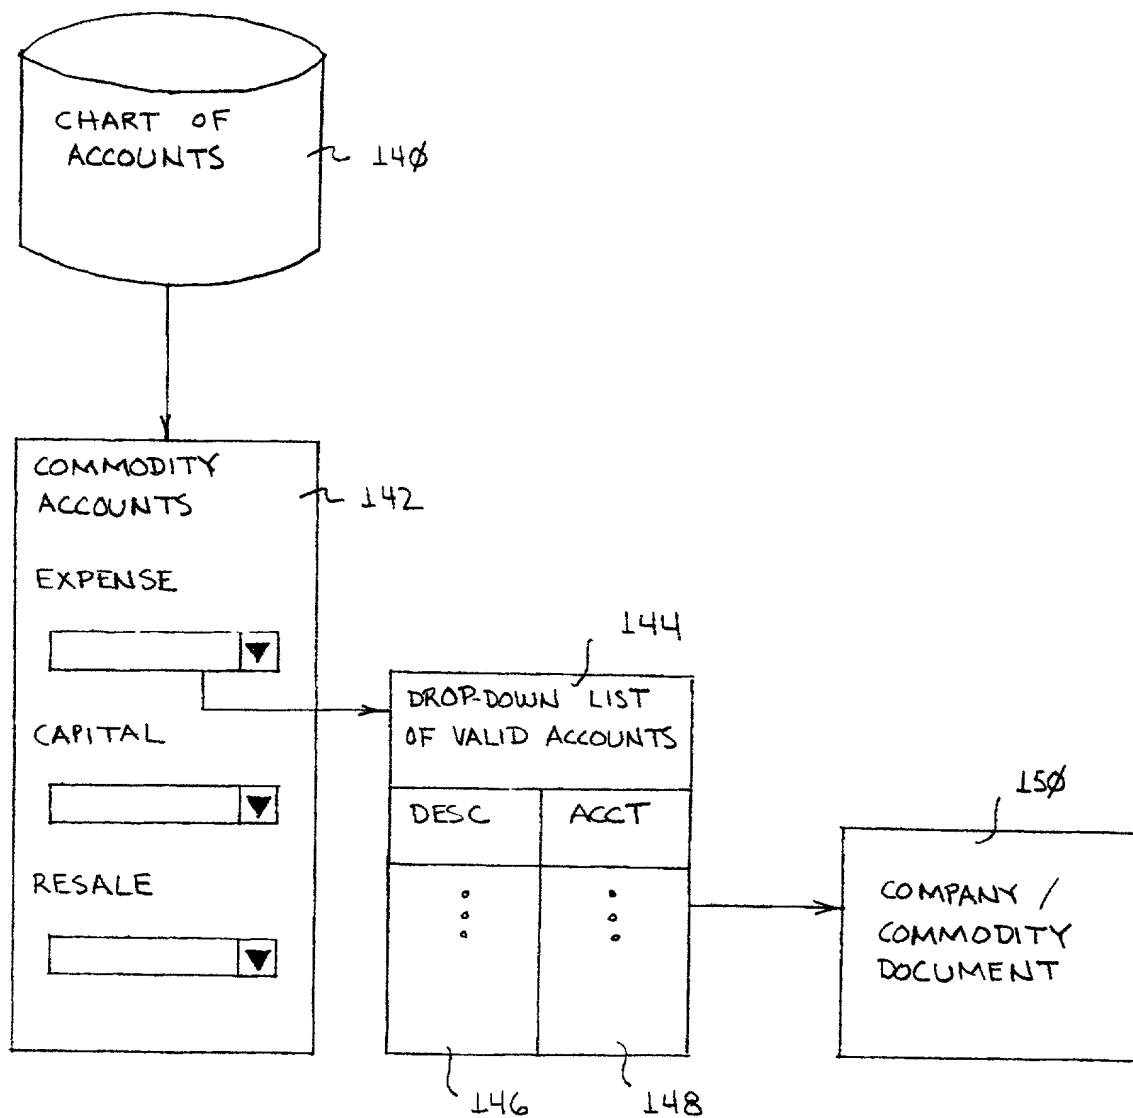
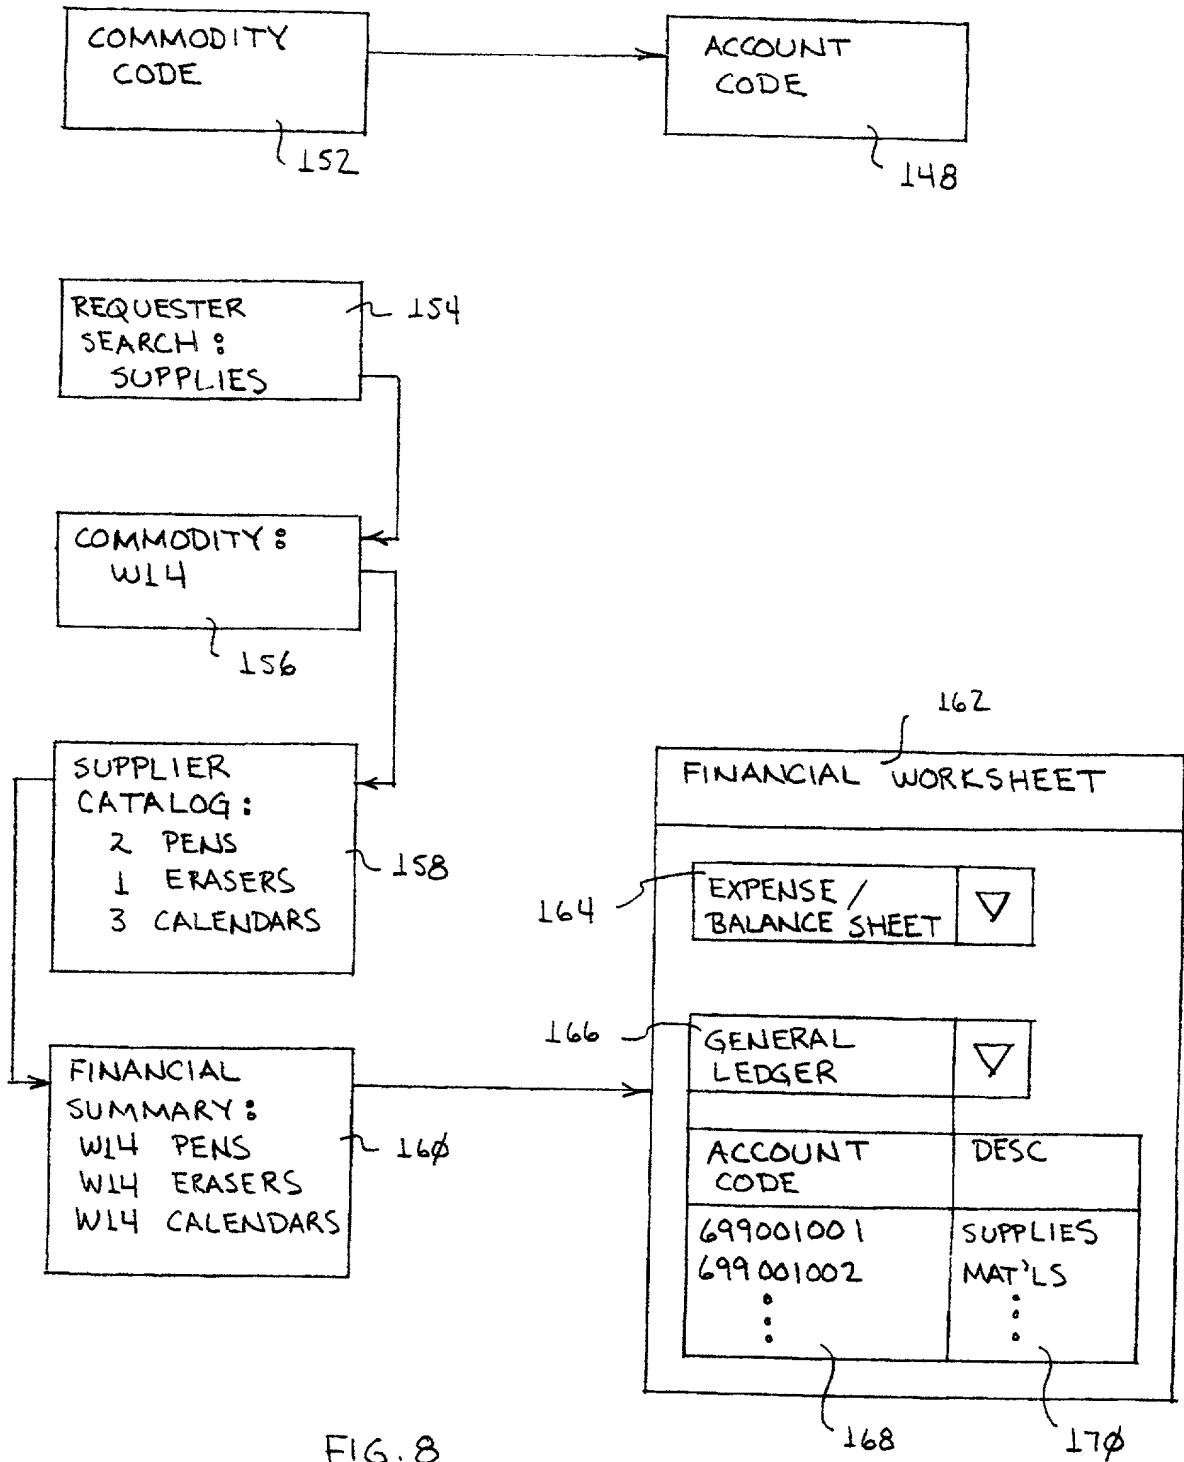


FIG. 7



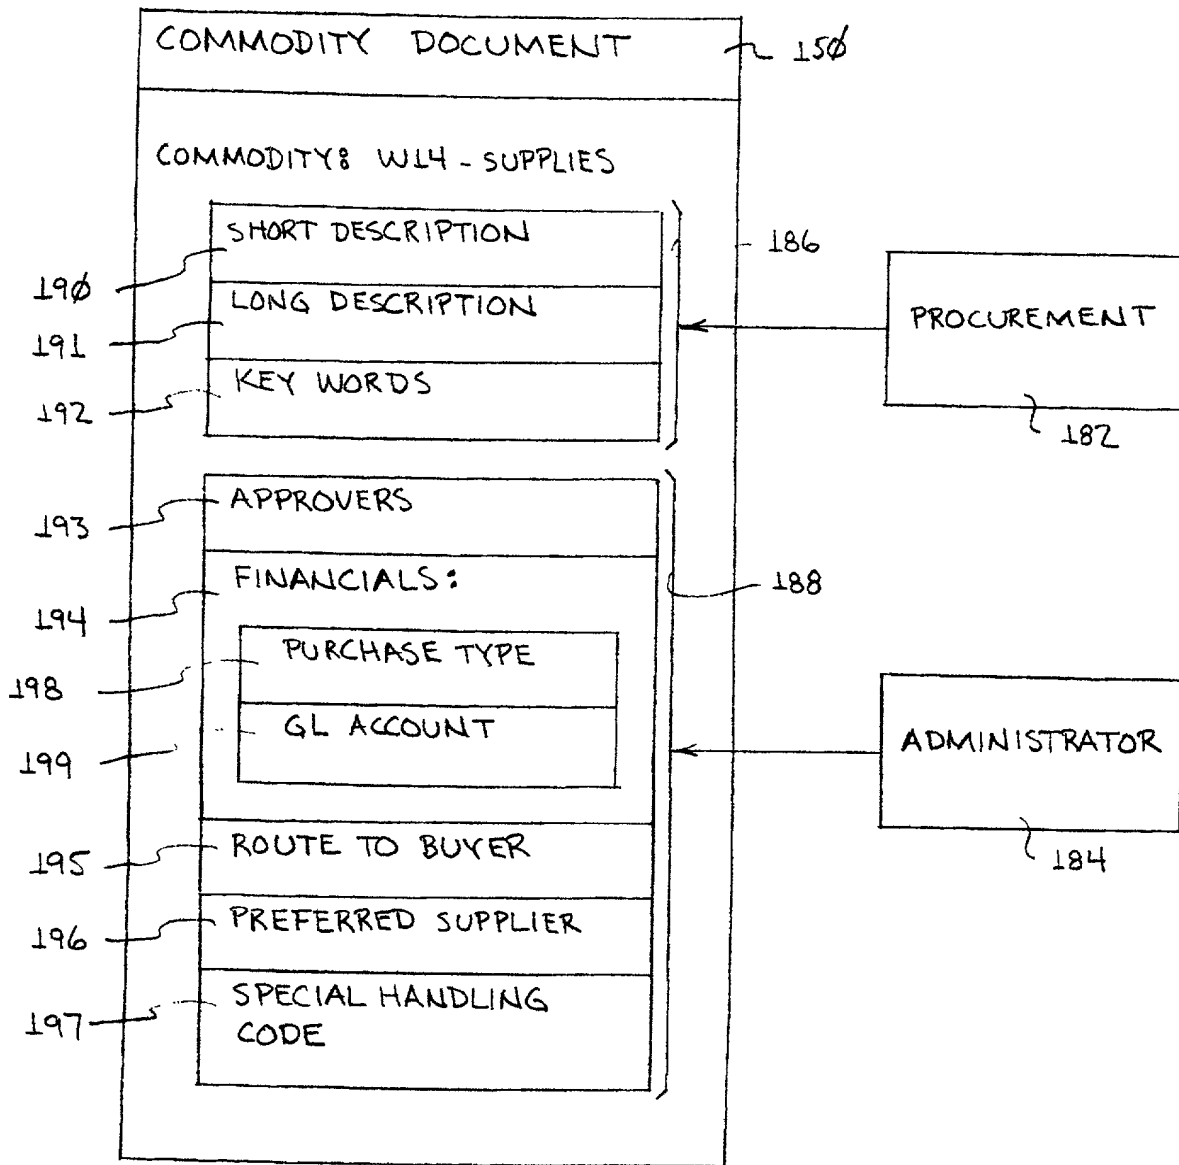


FIG. 9

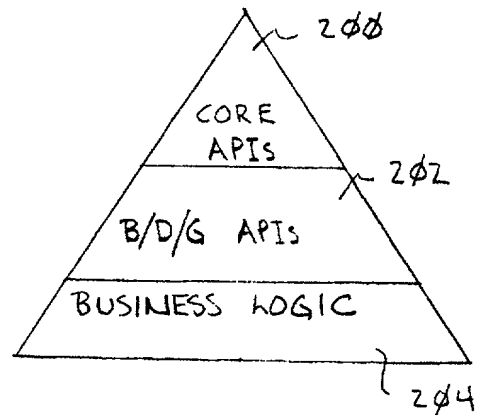


FIG. 10

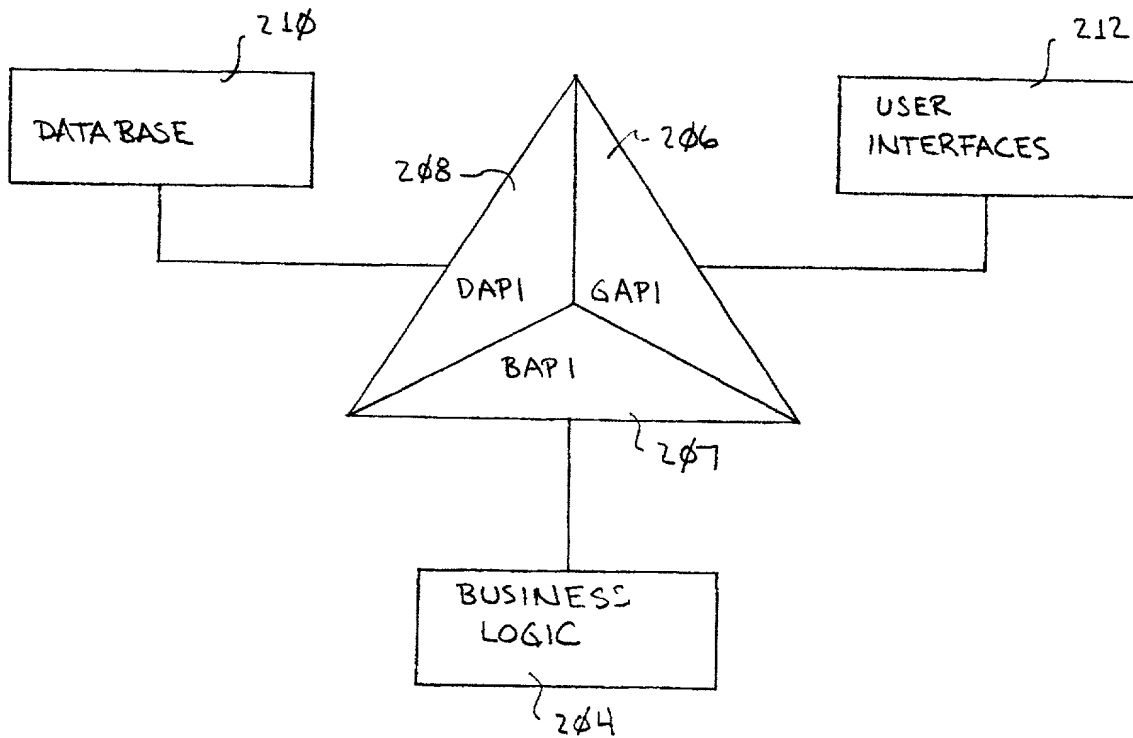


FIG. 11

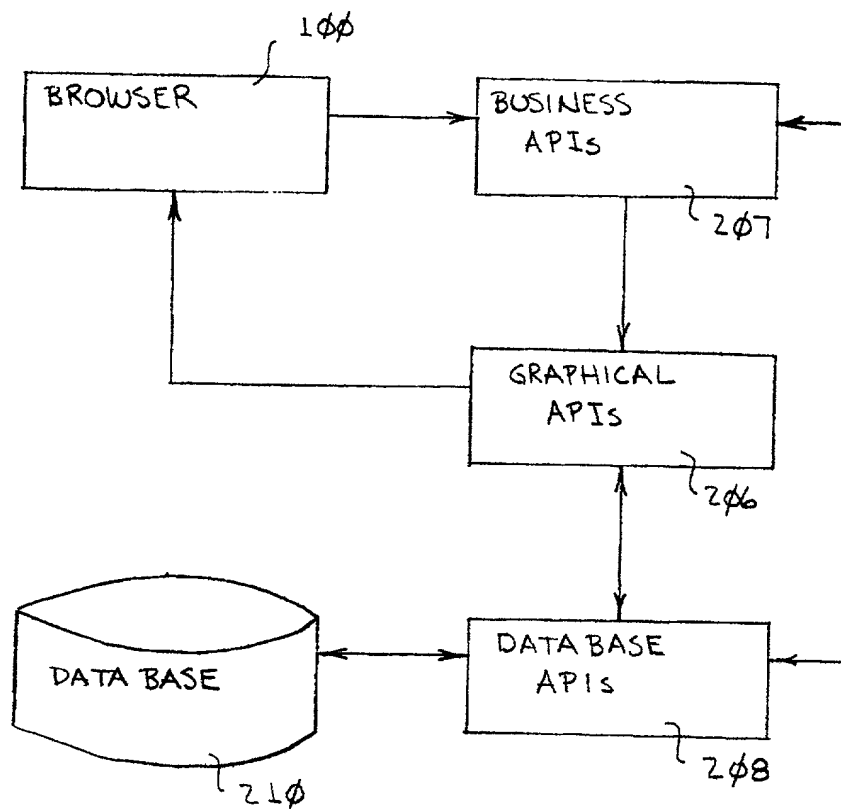


FIG. 12

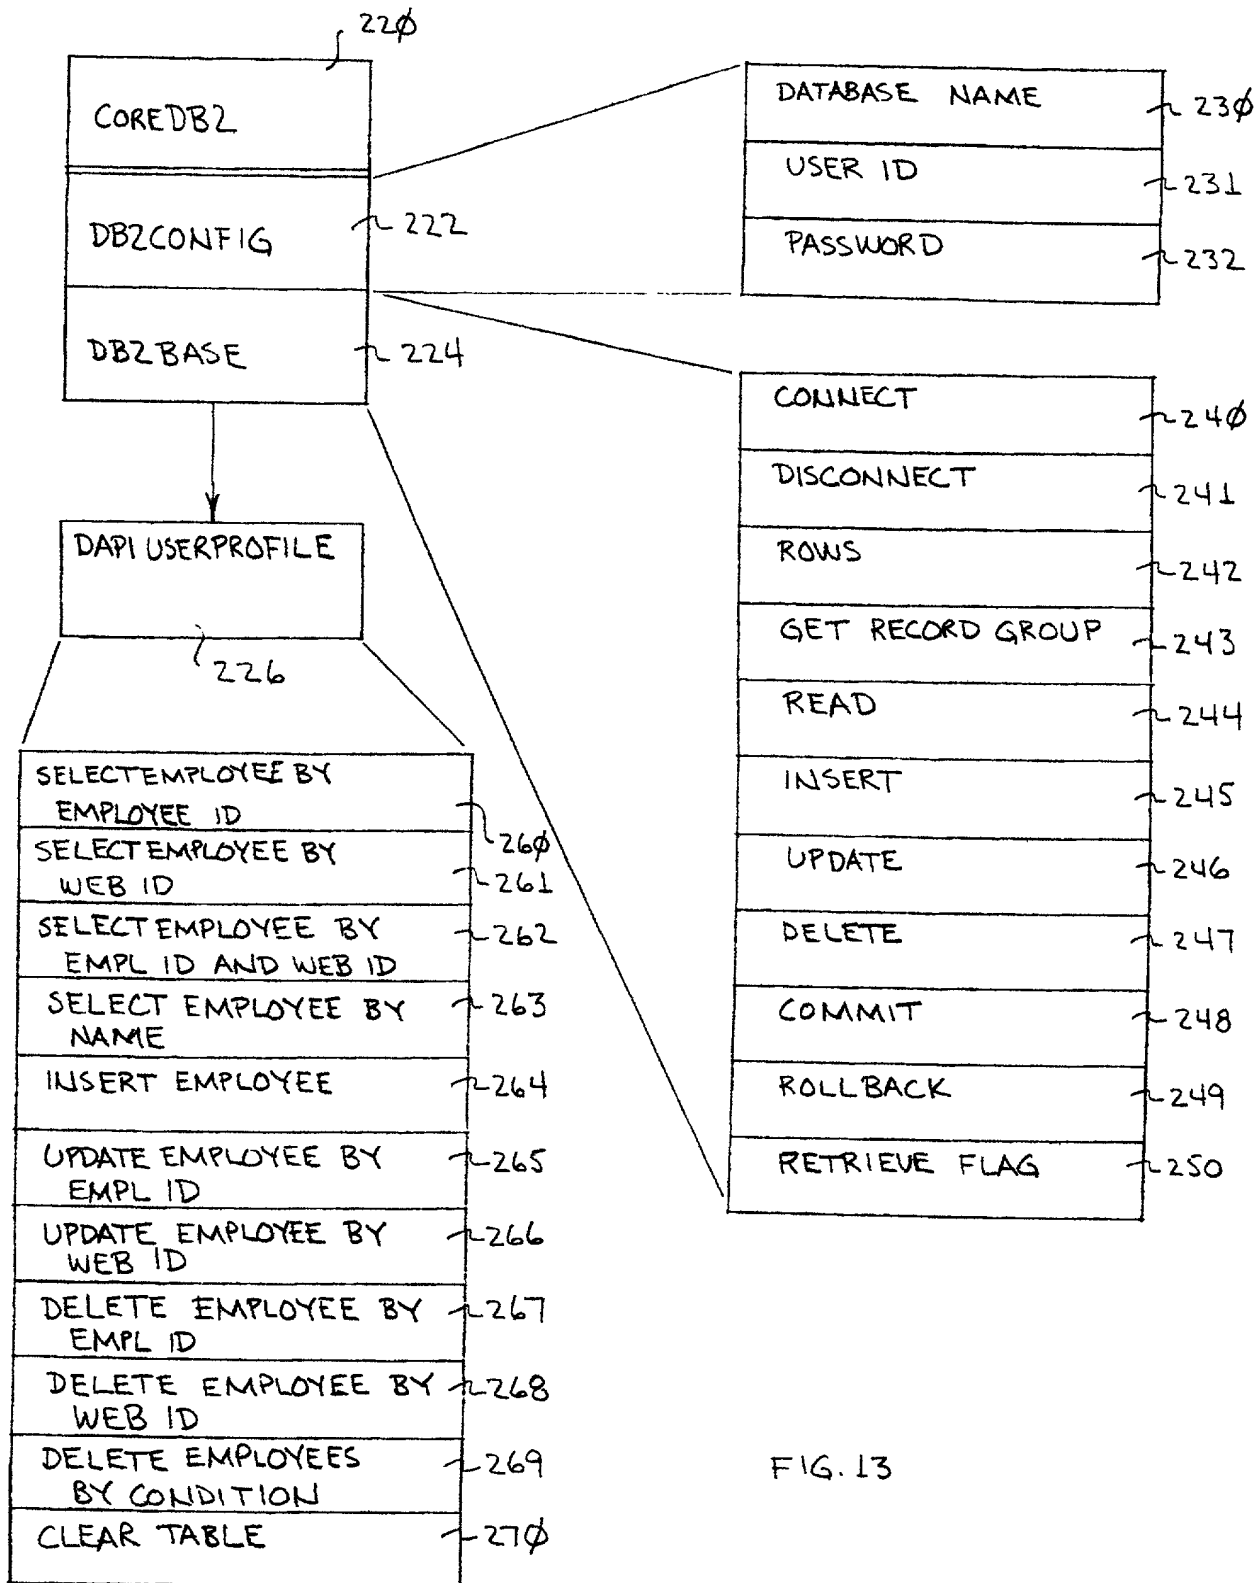


FIG. 13

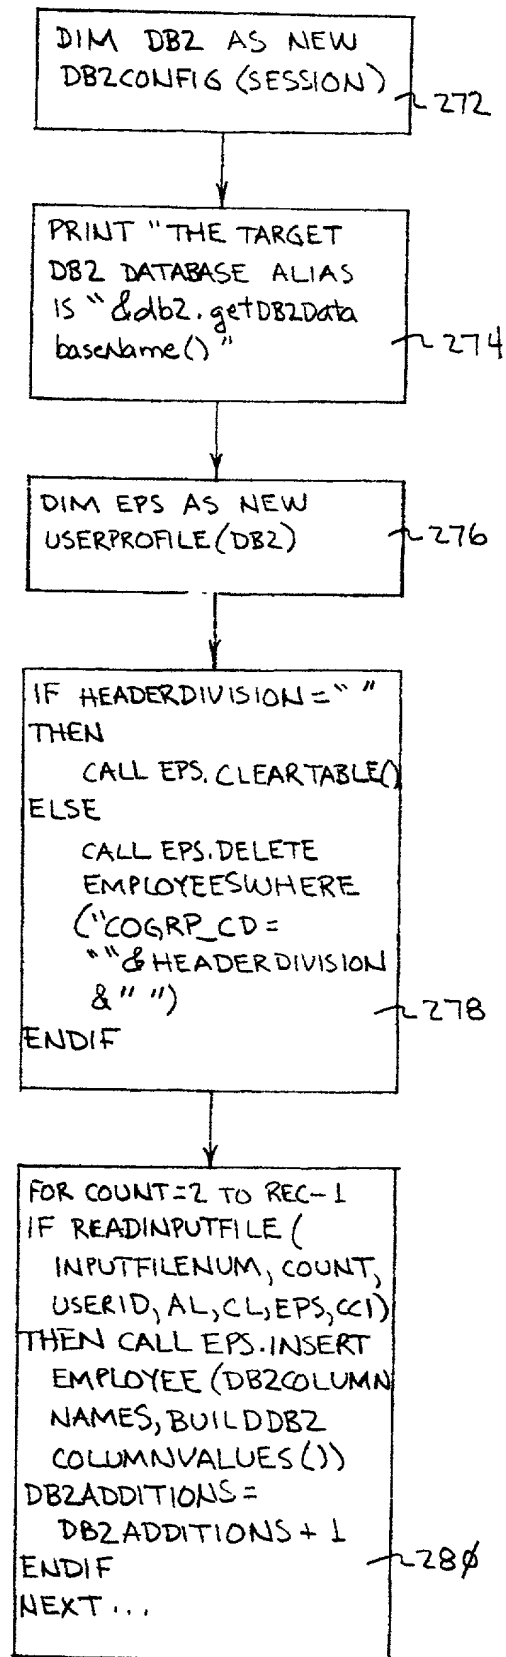


FIG. 14

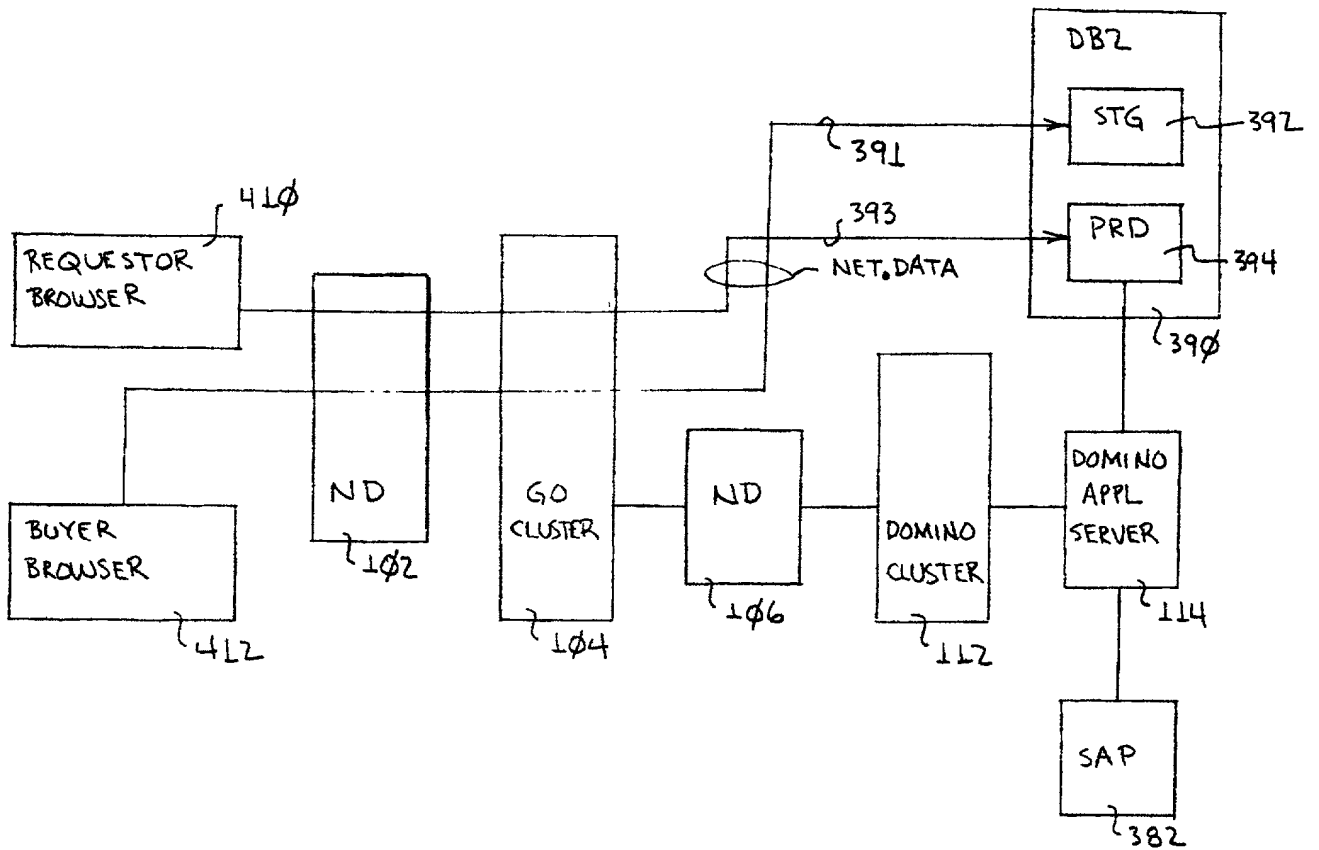


FIG. 15

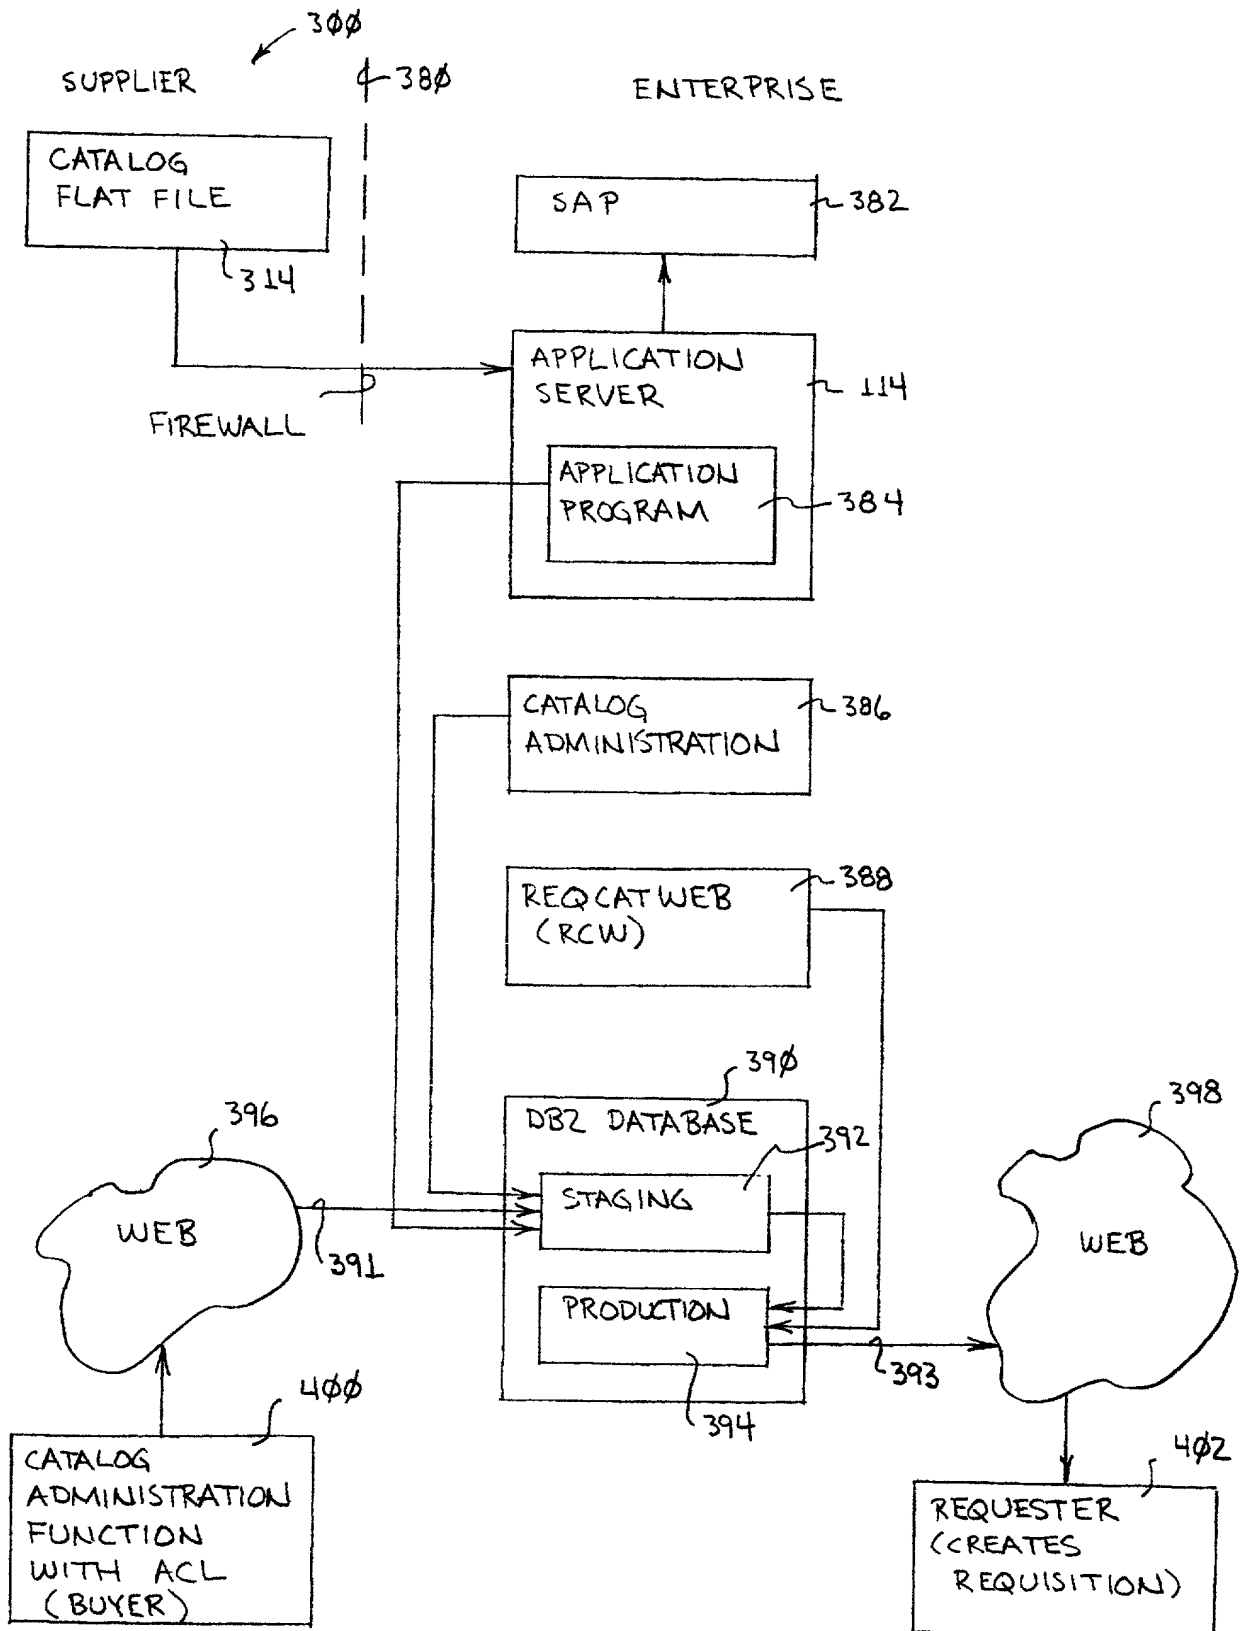


FIG. 16

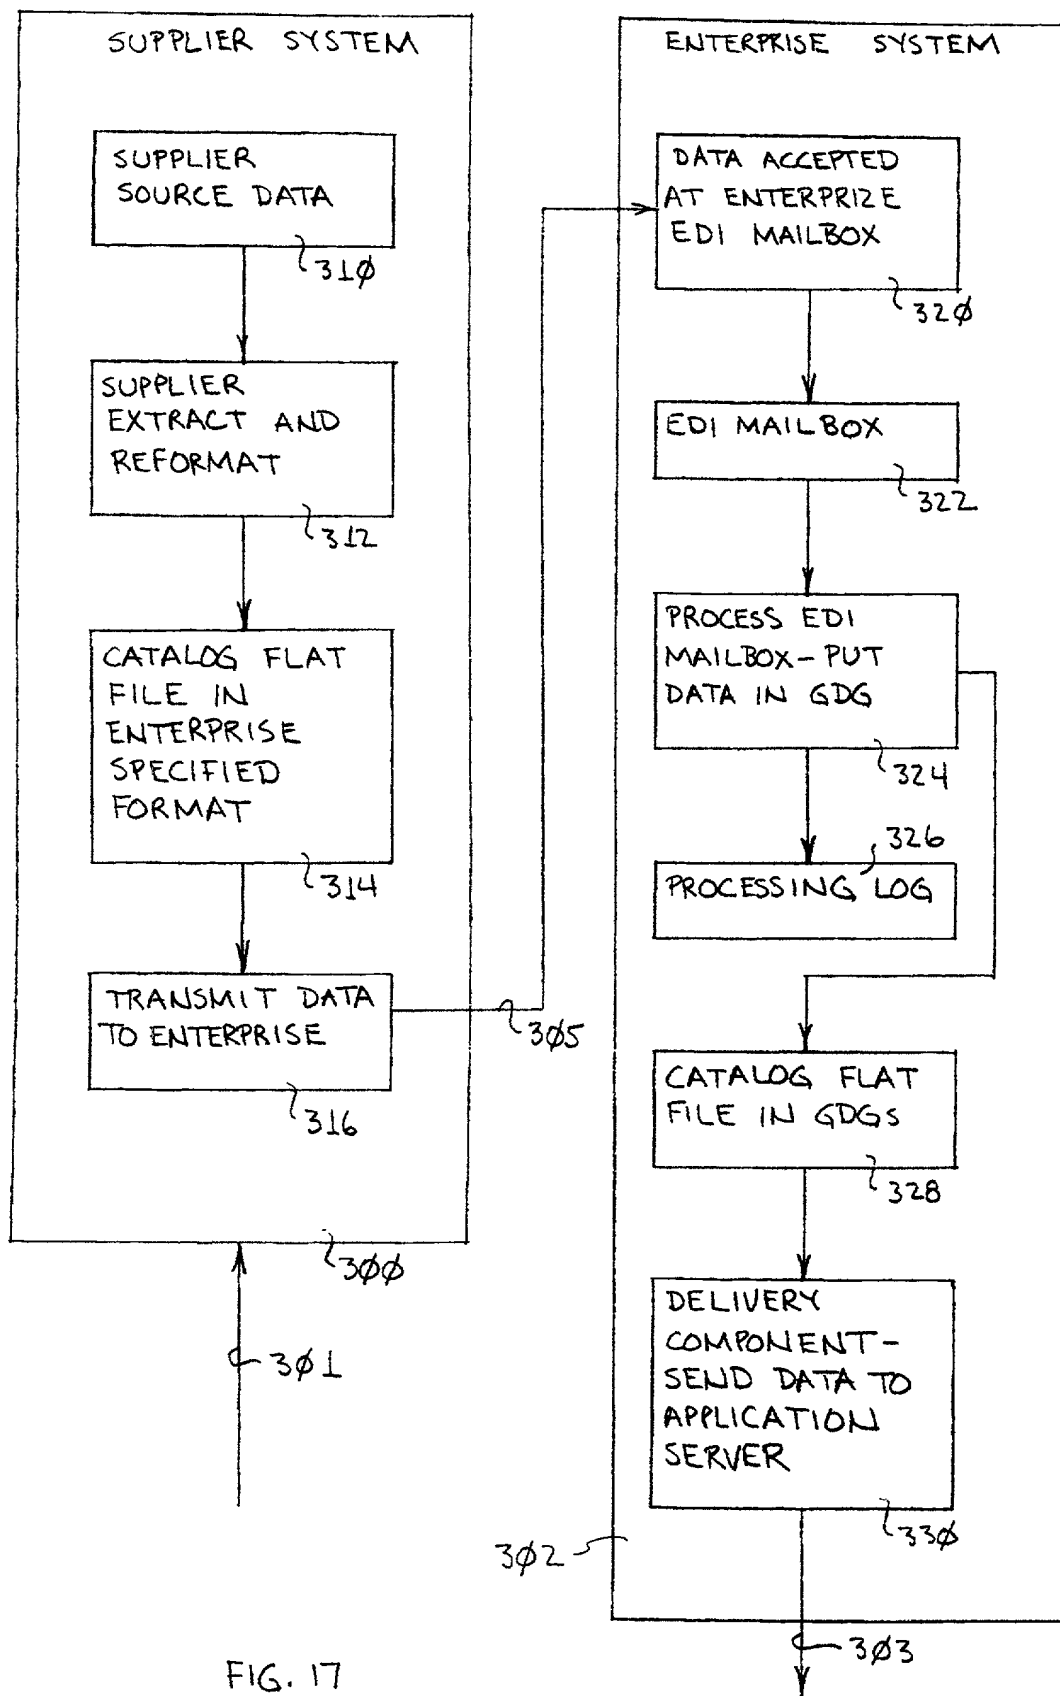


FIG. 17

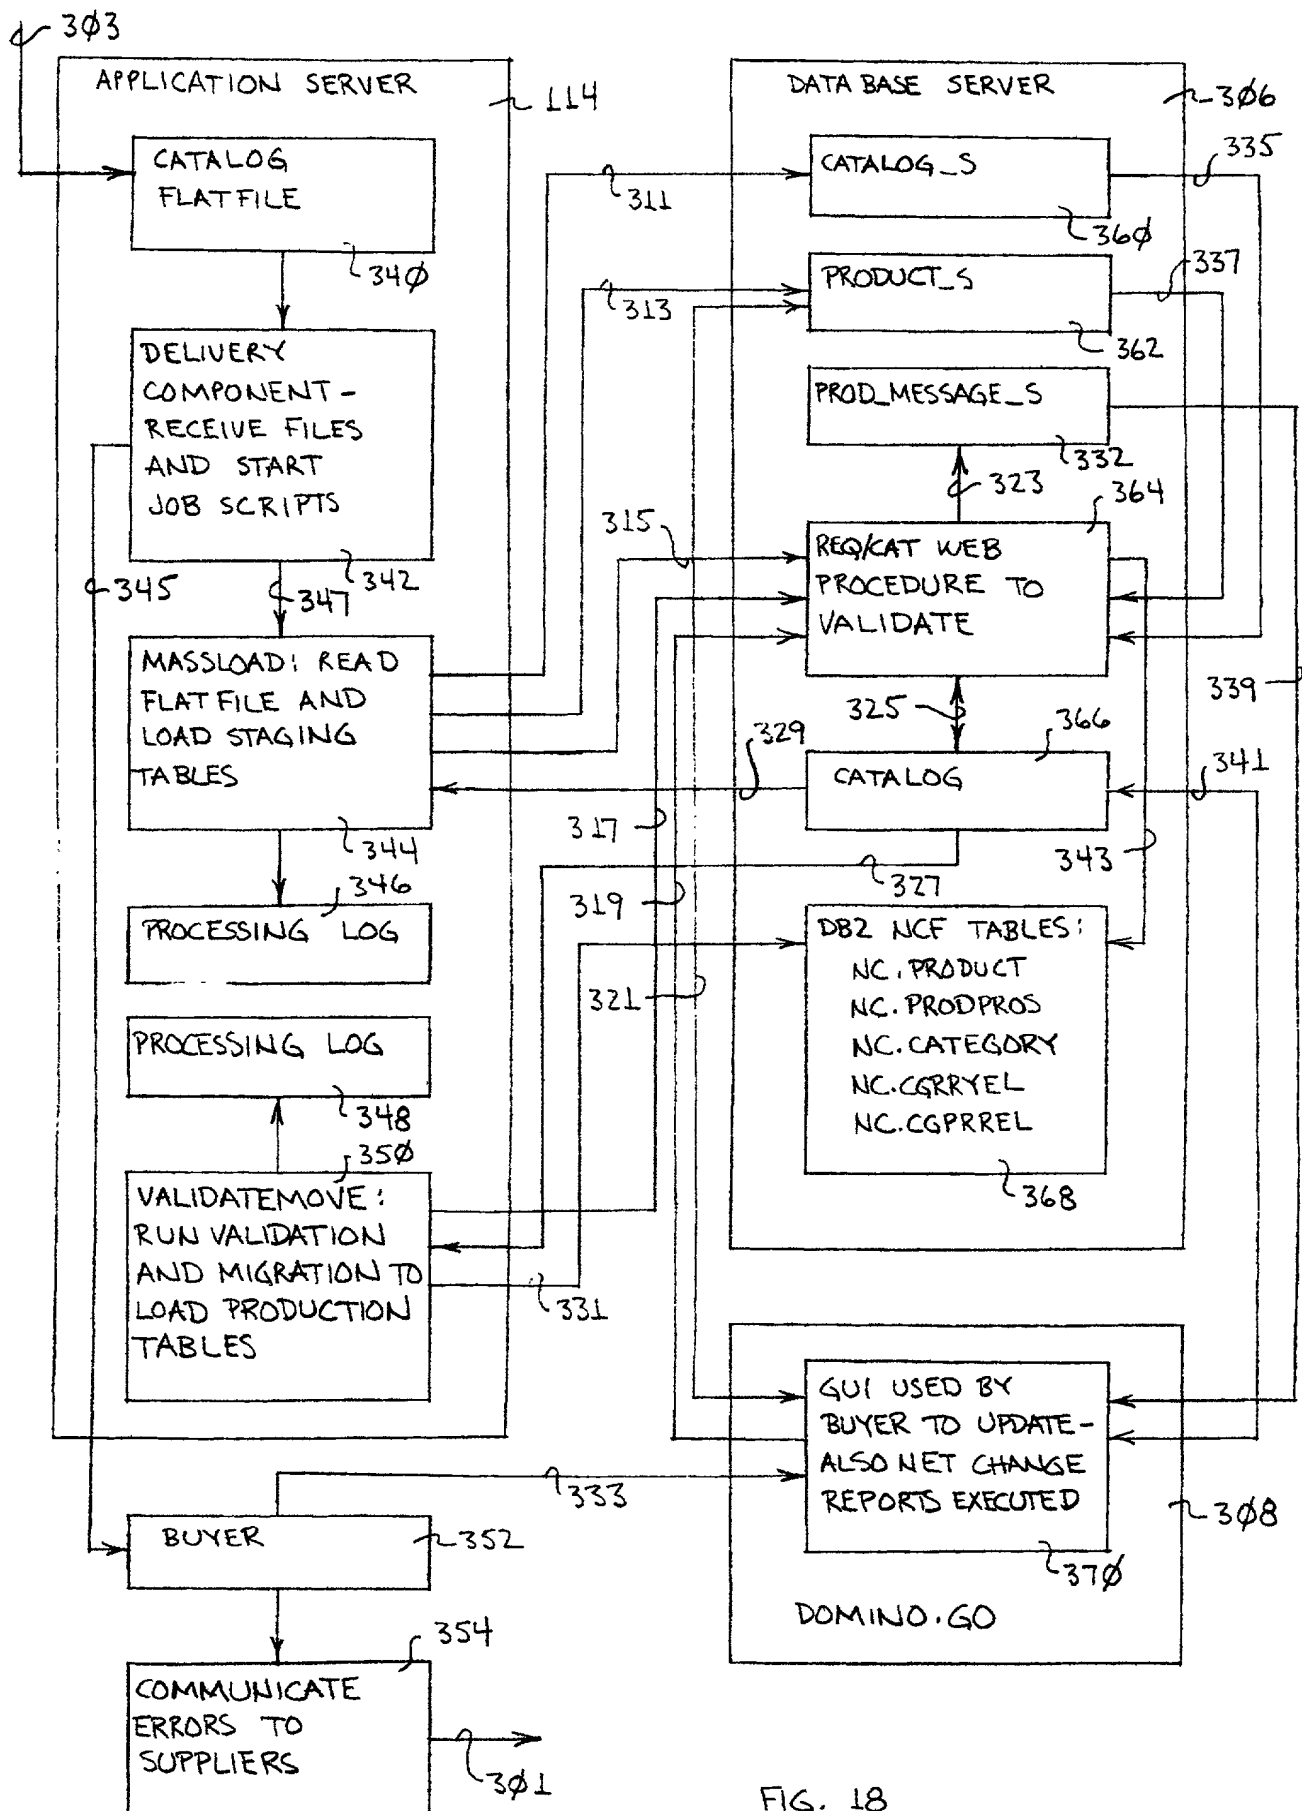


FIG. 18

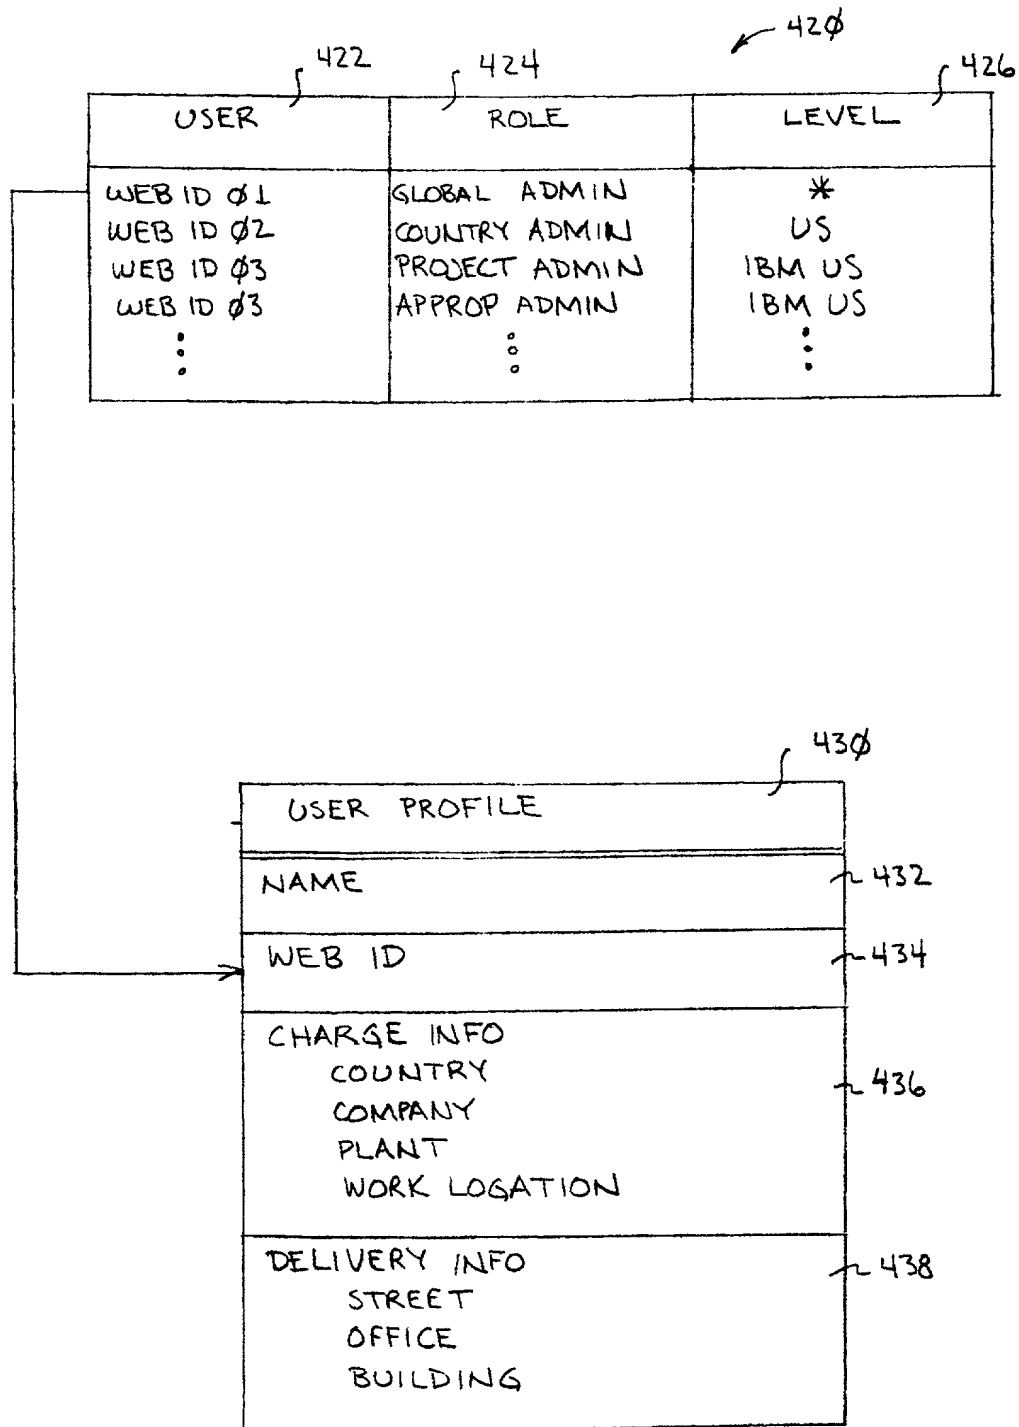


FIG. 19

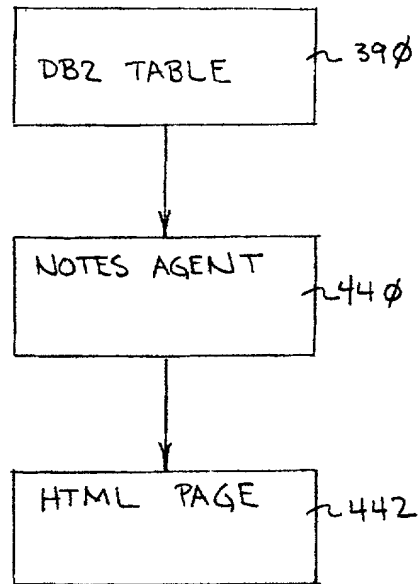


FIG. 20



FIG. 21

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **System and Method for Front End Business Logic and Validation**

the specification of which (check one)

 X is attached hereto.

 was filed on as Application Serial No. or PCAT International Application No. and was amended on (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventors certificate, or PCAT International application having a filing date before that of the application on which priority is claimed::

Prior Foreign Application(s):

Number	Country	Date/Month/Year	Priority Claimed
--------	---------	-----------------	------------------

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below.

Application Number	Filing Date
--------------------	-------------

I hereby claim the benefit under Title 35, United States Code, section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose information material to patentability of this application as defined in 37 CFR Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

Prior U.S. Applications:

Serial No.	Filing Date	Status (patented, pending, abandoned)
------------	-------------	---------------------------------------

As a named inventor, I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: David L. Adour, Reg. No. 29,604; Lawrence R. Fraley, Reg. No. 26,885; John R. Pivnichny, Reg. No. 43,001; Arthur J. Samodovitz, Reg. No. 31,297; William H. Steinberg, Reg. No. 28,540; Christopher A. Hughes, Reg. No. 26,914; Edward A. Pennington, Reg. No. 32,588; John H. Hoel, Reg. No. 26,279; Joseph C. Redmond, Jr., Reg. No. 18,753; and Shelley M Beckstrand, Reg. No. 24,886.

Send all correspondence to: Shelley M Beckstrand, P.C.
Attorney at Law
314 Main Street
Owego, NY 13827

Direct telephone calls to: (607) 687-9913 [alt: (607) 755-3268]

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

(1) Inventor: Jean-Paul Chollon

Signature: _____ Date: _____

Residence: 7, allée des merisiers
33650 Saint MEDARD D'Eyrans, France
Citizenship: France
Post Office Address: Same as residence

(2) Inventor: Timothy R. Kane

Signature: _____ Date: _____

Residence: 12 Pembroke Drive, Endicott, NY 13760
Citizenship: USA
Post Office Address: Same as residence

(3) Inventor: Amy J. Snavelly

Signature: _____ Date: _____

Residence: 2260 Mill Road, Binghamton, NY 13903
Citizenship: USA
Post Office Address: Same as residence

(4) Inventor: Sherry L. Wilson

Signature: _____ Date: _____

Residence: 8 Willow Lane, Conklin, NY 13748
Citizenship: USA
Post Office Address: Same as residence